



# Test Report: LCM-40KN

---

40W Multiple-Stage Output Current LED Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test  
Input Function Test  
Protection Function Test  
Control Function Test  
Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test  
E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1 : 700 mVp-p (Max)	I/P : 230VAC O/P : FULL LOAD Ta : 25°C	350mA : 75.2 mVp-p (Max) 500mA : 54.8 mVp-p (Max) 600mA : 38.8 mVp-p (Max) 700mA : 60.4 mVp-p (Max) 900mA : 36.8 mVp-p (Max) 1050mA : 36.6 mVp-p (Max)	P
2	NO LOAD O/P VOLTAGE	350mA : 100V~110V 500mA : 100V~110V 600mA : 100V~110V 700mA : 60V~65V 900mA : 60V~65V 1050mA : 60V~65V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	350mA : 102.69 V/230 VAC 500mA : 102.69 V/230 VAC 600mA : 102.69 V/230 VAC 700mA : 62.57 V/230 VAC 900mA : 62.57 V/230 VAC 1050mA : 62.57 V/230 VAC	P
3	RIPPLE CURRENT	±5%	I/P : 230VAC O/P : LED LOAD Ta : 25°C	350mA : ±1.9 % 500mA : ±2 % 600mA : ±1.8 % 700mA : ±1.7 % 900mA : ±1.5 % 1050mA : ±1.5 %	P
4	CURRENT TOLERANCE	±5%	I/P : 230VAC O/P : MIN-MAX Ta : 25°C	350mA : ± 0.3 % 500mA : ± 0.2 % 600mA : ± 0.2 % 700mA : ± 0.1 % 900mA : ± 0.1 % 1050mA : ± 0.1 %	P
5	SET UP TIME	230VAC : 500 ms (Max)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 388 ms	P
6	RISE TIME	230VAC : 80 ms (Max)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 18 ms	P
7	HOLD UP TIME	230VAC : 16 ms (TYP)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 23 ms	P
8	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	TEST : <5 %	P

**INPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	180VAC~295 VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C  I/P : LOW-LINE-3V= 177 V (PLEASE CHECK DERATING CURVE) HIGH-LINE+10V=305 V O/P : FULL/MIN LOAD ON : 30 Sec. OFF : 30 Sec 10MIN ( AC POWER ON/OFF NO DAMAGE )	164 V~295V  TEST : OK	P
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P : 200 VAC ~ 295 VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK	P
3	POWER FACTOR	0.975 / 230 VAC(TYP) 0.96 / 277 VAC(TYP)	I/P : 230 VAC I/P : 277 VAC O/P : FULL LOAD Ta : 25°C	PF= 0.993 / 230 VAC PF= 0.991 / 277 VAC	P
4	EFFICIENCY	91 % (TYP)	I/P : 230 VAC O/P : LED:80V @500mA Ta : 25°C	91.30 %	P
5	INPUT CURRENT	230V/ 0.23 A (TYP) 277V/ 0.2 A (TYP)	I/P : 230 VAC I/P : 277 VAC O/P : FULL LOAD Ta : 25°C	I = 0.219 A/ 230 VAC I = 0.18 A/ 277 VAC	P
6	INRUSH CURRENT	230V/ 20 A (TYP) (twidth=260us measured at 50% Ipeak) COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 18.2 A/ 230 VAC T50= 255 us	P
7	LEAKAGE CURRENT	< 0.5 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.003 mA N-FG : 0.002 mA	P
8	NO LOAD CONSUMPTION	< 1 W	I/P : 180VAC I/P : 230VAC I/P : 277VAC O/P : NO LOAD Ta : 25°C	< 0.955 W < 0.964 W < 0.979 W	P
9	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be lower than 20% when output loading is 75% or higher	I/P : 230 VAC O/P : 75% LOAD  I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 8.63 /230VAC  THD : 11.82 /277VAC	P

**PROTECTION FUNCTION TEST**


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	OVER VOLTAGE PROTECTION	CH1 : 110 V ~ 130 V	I/P : 230 VAC I/P : 180 VAC O/P : MIN LOAD Ta : 25°C	121.86V/ 230 VAC 122.09V/ 180VAC Shut down Re- power ON	P

2	OVER TEMPERATURE PROTECTION	Shut down Re-power ON	I/P : 230 VAC O/P : FULL LOAD	O.T.P. Active Shut down Re-power ON	P
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P : 295 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Constant Current Limiting	P

### CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																	
1	AUXILIARY POWER	12V @ 50mA for driving fan; Tolerance $\pm 5\%$	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	12.085V/230V	P																																																	
2	DIP Switch Table	<p>LCM-40KN is a multiple-stage output current supply, selection of output current through DIP switch as table below.</p> <table border="1"> <thead> <tr> <th>Io \ DIP S.W.</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>350mA</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>500mA</td> <td>ON</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>600mA(Factory Setting)</td> <td>ON</td> <td>ON</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>700mA</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>----</td> <td>----</td> <td>ON</td> </tr> <tr> <td>900mA</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>----</td> <td>ON</td> </tr> <tr> <td>1050mA</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>ON</td> </tr> </tbody> </table> <p>TEST : OK</p>	Io \ DIP S.W.	1	2	3	4	5	6	350mA	----	----	----	----	----	----	500mA	ON	----	----	----	----	----	600mA(Factory Setting)	ON	ON	----	----	----	----	700mA	ON	ON	ON	----	----	ON	900mA	ON	ON	ON	ON	----	ON	1050mA	ON	ON	ON	ON	ON	ON			P
Io \ DIP S.W.	1	2	3	4	5	6																																																
350mA	----	----	----	----	----	----																																																
500mA	ON	----	----	----	----	----																																																
600mA(Factory Setting)	ON	ON	----	----	----	----																																																
700mA	ON	ON	ON	----	----	ON																																																
900mA	ON	ON	ON	ON	----	ON																																																
1050mA	ON	ON	ON	ON	ON	ON																																																
3	TEMP. COMPENSATION	<p><b>SPECIFICATION:</b> LCM-40KN have the built-in temperature compensation function (<math>T \uparrow</math> , <math>I_o \downarrow</math> ). By connecting a temperature sensor ( NTC resistor) between the NTC +/- terminal of LCM-40KN and the detecting point on the lighting system or the surrounding environment, output current of LCM-40KN could be correspondingly changed to ensure the long life of LED.</p> <p>1.LCM-40KN can still be operated well when the NTC resistor is not connected and the value of output current will be the current level that you set</p> <p>2.</p> <table border="1"> <thead> <tr> <th>NTC resistance</th> <th>Output Current</th> </tr> </thead> <tbody> <tr> <td>220K</td> <td>&lt; 60°C, 100% of the rated current (corresponds to the setting current level) &lt; 70°C, 100% of the rated current (corresponds to the setting current level)</td> </tr> <tr> <td>330K</td> <td>&lt; 80°C, 100% of the rated current (corresponds to the setting current level) &gt; 60°C, output current begin to reduce, details please refer to the curve.</td> </tr> <tr> <td>470K</td> <td>&gt; 70°C, output current begin to reduce, details please refer to the curve. &gt; 80°C, output current begin to reduce, details please refer to the curve.</td> </tr> </tbody> </table> <p>Notes: 1. MW does not offer the NTC resistor and all the data above are measured by using THINKING TTC03 series. 2. If other brands of NTC resistor is applied,please check the temperature curve first. 3. Synchronization function of the power supply will be invalid when the "temperature compensation" function is in use</p> <p><b>TEST CONDITION</b> : I/P : 230 VAC</p>	NTC resistance	Output Current	220K	< 60°C, 100% of the rated current (corresponds to the setting current level) < 70°C, 100% of the rated current (corresponds to the setting current level)	330K	< 80°C, 100% of the rated current (corresponds to the setting current level) > 60°C, output current begin to reduce, details please refer to the curve.	470K	> 70°C, output current begin to reduce, details please refer to the curve. > 80°C, output current begin to reduce, details please refer to the curve.			P																																									
NTC resistance	Output Current																																																					
220K	< 60°C, 100% of the rated current (corresponds to the setting current level) < 70°C, 100% of the rated current (corresponds to the setting current level)																																																					
330K	< 80°C, 100% of the rated current (corresponds to the setting current level) > 60°C, output current begin to reduce, details please refer to the curve.																																																					
470K	> 70°C, output current begin to reduce, details please refer to the curve. > 80°C, output current begin to reduce, details please refer to the curve.																																																					

RESULT:OK

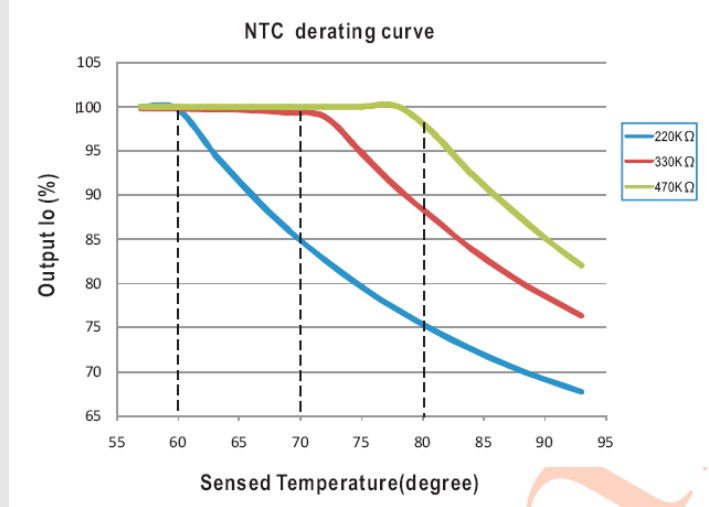


4 Dimming function

**SPECIFICATION:**


**a. PUSH dim(primary side)**

☉ PUSH dimming



- KNX bus need to be connected when using PUSH Dimming
- The detailed function of PUSH dimming, please refer to the database.
- The maximum length of the cable between the push button and driver is 20 meters.
- The mechanical push button can be connected only between the PUSH terminal, as displayed in the diagram, and AC/L (in brown or black); it will lead to short circuit if it is connected to AC/N.
- In case the PUSH dimming is set locally, up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- In case the PUSH dimming is set independently via ETS, the number of drivers is done through group address and determined by the ETS project designer.

☉ AC/DC input monitor

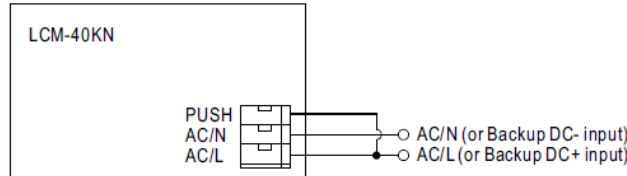

- KNX bus need to be connected when using AC/DC input monitor
- The detailed function of AC/DC input monitor(emergency lighting), please refer to the database and instruction manual.


**b. KNX interface**

※ KNX interface

- Apply KNX Bus cable between KNX+ and KNX-
- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>

Parametrization options	Description
Switch functions	<ul style="list-style-type: none"> <li>• Turn on brightness</li> <li>• Dimming speed for turn on/off</li> <li>• Switch telegram and status</li> <li>• Switch on/off delay</li> </ul>
Dimming	<ul style="list-style-type: none"> <li>• Dimming speed for 0~100%</li> <li>• Allow switch on via relative dimming</li> <li>• Push dimming with AC input port</li> <li>• Block object for push dimming</li> </ul>
Brightness value	<ul style="list-style-type: none"> <li>• Dimming speed for transition brightness values</li> <li>• Permit set switch on and off brightness via value</li> <li>• Brightness value and status</li> </ul>
Fault message	<ul style="list-style-type: none"> <li>• Lamp fault</li> <li>• AC/DC input monitor fault messages</li> </ul>
Other functions	<ul style="list-style-type: none"> <li>• Reaction on KNX voltage failure/recovery</li> <li>• Power-On level</li> <li>• Dimming curve select(linear/log)</li> <li>• Synchronous dimming output</li> <li>• Block function(Block1&amp;Block2)</li> <li>• Staircase lighting function(multi-stage switch-off)</li> </ul>
General function	<ul style="list-style-type: none"> <li>• Cyclic monitoring telegram(In operation)</li> </ul>
8 Scenes	<ul style="list-style-type: none"> <li>• Recall and save via KNX with 8-bit telegram</li> </ul>
Operating hours & CLO	<ul style="list-style-type: none"> <li>• Operating hours counter</li> <li>• Constant light out(5 scheduled divisions)</li> </ul>
Power consumption feedback	<ul style="list-style-type: none"> <li>• Power consumption report</li> </ul>

P

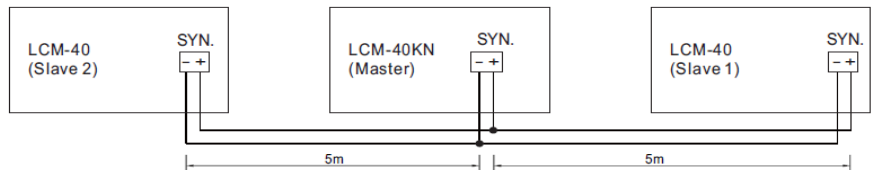5	SYNCHRONIZATION OPERATION	<p><b>SPECIFICATION:</b></p> <ul style="list-style-type: none"> <li>• Synchronization up to 10 drivers (1 master + 9 slaves)</li> <li>• Dimming operating range : 6%~100%</li> <li>• Sync cable length : &lt; 5m</li> <li>• Sync cable type : Flat cable</li> <li>• Sync cable cross section area : 22 – 24 AWG (0.2~0.3mm<sup>2</sup>)</li> </ul>  <p><b>TEST CONDITION :</b> I/P : 230 VAC FULL LOAD  <b>RESULT:OK</b></p>	P
---	---------------------------	--	---

### COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor ( D to S) or (C to E) Peak Voltage	U2 Rated LC700HG:550V/5.2A	I/P : High-Line +3V = 298 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 438 V (2) 432 V (3) 436 V	P
2	Diode Peak Voltage	D100 Rated STTH1003SB:300V/10A	I/P : High-Line +3V = 298 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 122 V (2) 9 V (3) 88.8 V	P
3	Input Capacitor Voltage	C5 Rated: 22u/450V 105°C 12.5*20 CST	I/P : High-Line +3V = 298 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 436 V (2) 436 V (3) 440 V	P
4	Control IC Voltage Test	U2 Rated LC700HG 11.4V ~15V	I/P : High-Line +3V = 298 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 13 V (2) 12.8 V (3) 13 V	P
5	Power Transistor ( D to S) or (C to E) Peak Voltage	Q1 Rated IPD60R600E6 7.3A/650V	I/P : High-Line +3V = 298 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 444 V (2) 444 V (3) 440 V	P

### SAFETY & E.M.C. TEST

#### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75 KVAC/min	I/P-O/P : 4 KVAC/min Ta : 25°C	I/P-O/P : 2.29 mA	P

				NO DAMAGE	
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P : 500 VDC Ta : 25°C/70%RH	I/P-O/P : 30 GΩ	P
				NO DAMAGE	

### E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	HARMONIC	EN61000-3-2 CLASS C	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	PASS	P
2	CONDUCTION	EN55015 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab	P
3	RADIATION	EN55015 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab	P
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A	P
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A	P
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N : 1KV L,N-PE : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A	P
7	Test by certified Lab & Test Report Prepare				

## ■ RELIABILITY TEST

### ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	TEMPERATURE RISE TEST	MODEL : LCM-40      DIP switch : 1050mA 1. ROOM AMBIENT BURN-IN : 14 HRS I/P : 230VAC O/P : FULL LOAD Ta=24.4 °C 2. HIGH AMBIENT BURN-IN : 52 HRS I/P : 230VAC O/P : FULL LOAD Ta=51.4 °C			P

		NO	Position	PART NUMBER	ROOM AMBIENT Ta= 24.4 °C	HIGH AMBIENT Ta= 51.4 °C		
		1	C11	154/450V 10% P=10 MMX	70.9°C	90.7°C		
		2	C12	154/450V 10% P=10 MMX	69.5°C	90.7°C		
		3	RG1	PS78L12A 0.1A/12V 1% TO92	65.2°C	92.1°C		
		4	LF2	TR1066	61.5°C	81.0°C		
		5	BD1	4A/800V SILICON UD4KB80	70.1°C	90.0°C		
		6	L1	TR991-R1	60.5°C	81.9°C		
		7	L2	TF2530	69.2°C	88.8°C		
		8	C60	10u/50V UL10Kh 5*11 YXM	66.1°C	87.2°C		
		9	C5	22u/450V 105°C 12.5*20 CST	68.8°C	93.8°C		
		10	C61	100u/35V UL6Kh 6.3*11 ZLH	73.8°C	93.8°C		
		11	U2	LCS700HG eSIP-16C	74.3°C	107.2°C		
		12	D91	BYV26EGP 1A/1KV DO-204AC	72.9°C	101.0°C		
		13	C36	33u/50V UL10Kh 6.3*11 YXM	60.9°C	91.4°C		
		14	C92	123/1.6KV 5% P=15 R74 (125°C)	76.6°C	104.2°C		
		15	RTH2	100KΩ 3Φ TTC3A104F4193EY 1%	70.8°C	96.8°C		
		16	T1	TF2528	82.8°C	106.5°C		
		17	C203	220u/35V UL8Kh 8*11.5 ZLH	68.5°C	88.3°C		
		18	C105	150u/160V 105°C 12.5*25 KXJ	57.3°C	80.9°C		
		19	LF100	TR1065	57.7°C	78.7°C		
		20	Q1	IPD60R600E6 7.3A/650V TO252	69.1°C	88.2°C		
		21	D8	SFRD NSF03B60 3A/600V t=2.1	72.2°C	89.2°C		
		22	D100	TANDEM STTH1003SB 10A/300V DPAK	76.0°C	105.1°C		
		23	U905	LCM000010DA01RRR	66.9°C	84.4°C		
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 230VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK		P	
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE		I/P : 305 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK		P	
4	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0-50°C)		I/P : 230 VAC O/P : FULL LOAD	± 0.00009 %/°C(0-50°C)		P	





5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC	OK	P
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec	OK	P
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK	P
8	CAPACITOR LIFE CYCLE	LCM-40 ;SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 798434HRS (2) 109978HRS (3) 208132HRS (4) 313174HRS	P
9	MTBF	Conducted by Parts Stress Analysis Prediction 1764.6K hrs min. Telcordia SR-332 (Bellcore) ; 190.4K hrs min. MIL-HDBK-217F (25°C)		P
10	DMTBF	Demonstration Mean Time Between Failure(Expected Life) : 30,000 hours @ Tcase 75°C 50,000 hours @ Tcase 65°C		P

DATE	SAMPLE	TESTER		APPROVAL
2012/11/29	RD SAMPLE	DANIEL GAO	SANFORD SU	VINCENT TSENG
2013/2/22	PRODUCT SAMPLE W1301A31	DANIEL GAO	SANFORD SU	VINCENT TSENG

2009/08/04 A50-F023