



Test Report: MPM-65-24


65W AC-DC High Reliable PCB-Mount Green
Medical Power Moudle

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -2.0%~ +2.0 %	I/P: 80VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.05%~0.09%
2	LINE REGULATION (Max)	V1: -0.5%~ +0.5 %	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.04%~0.09%
3	LOAD REGULATION(Max)	V1:-0.5%~ +0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.05%~0.09%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	1.3%
5	PEAK LOAD TEST	≥ 10 Sec.	I/P: 230VAC O/P:PEAK LOAD Ta:25°C	OK
6	RIPPLE & NOISE(Max)	V1: 200mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 50mVp-p

high frequency : 10us

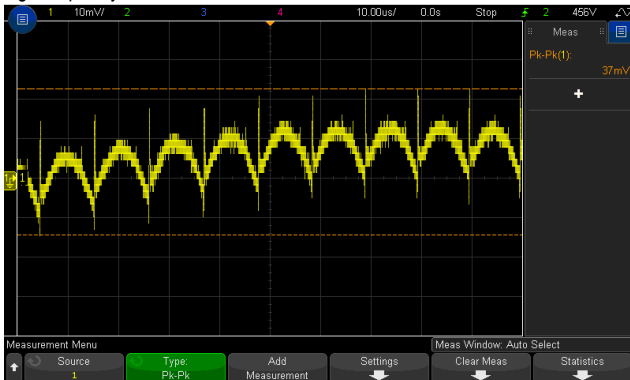


low frequency : 5ms

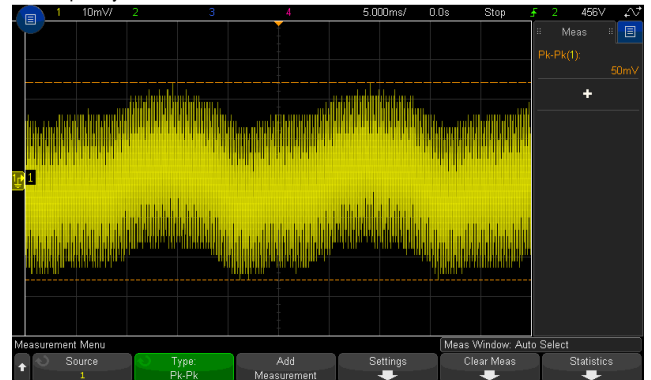








7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/201 ms 115VAC/221 ms
---	------------------	--------------------------------	--	--------------------------------

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

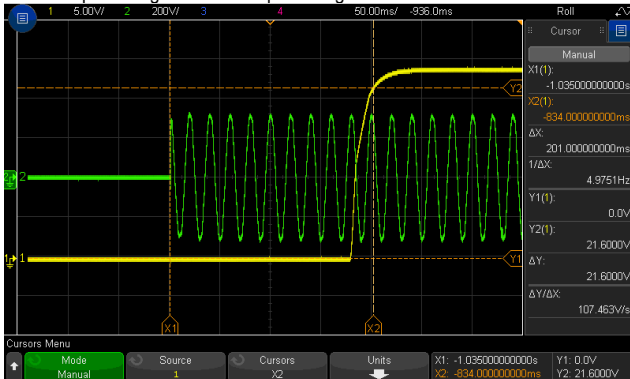

INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

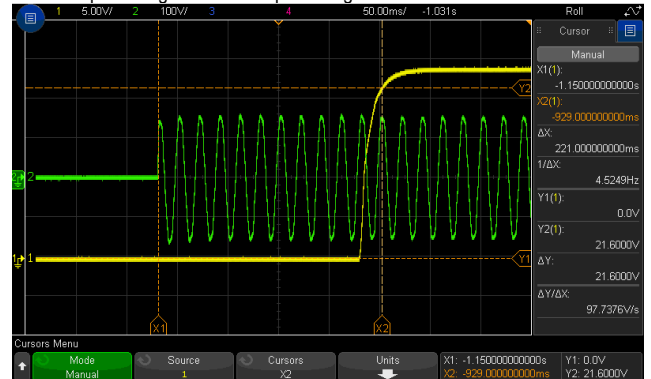

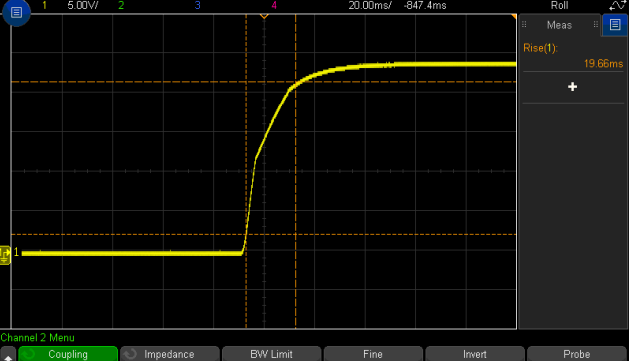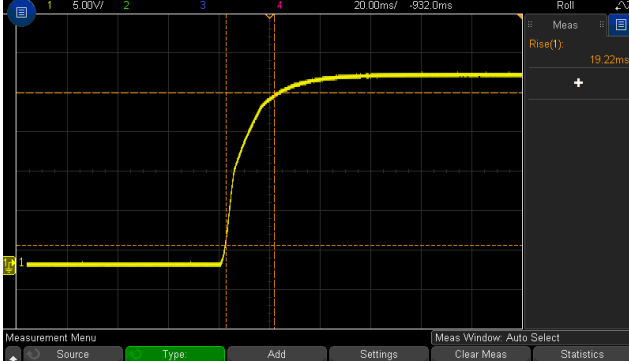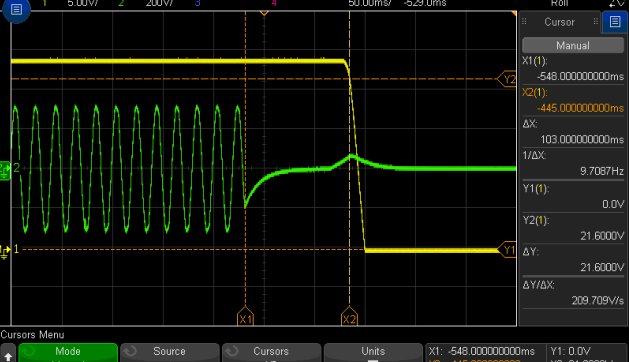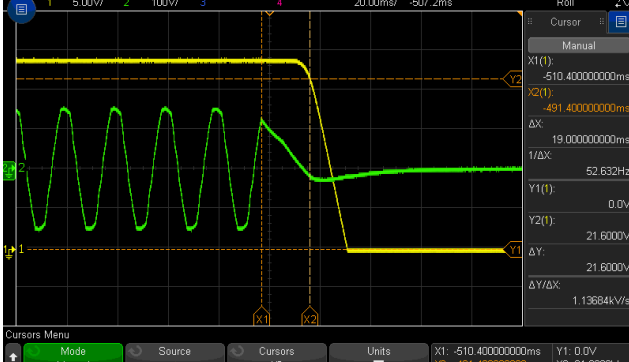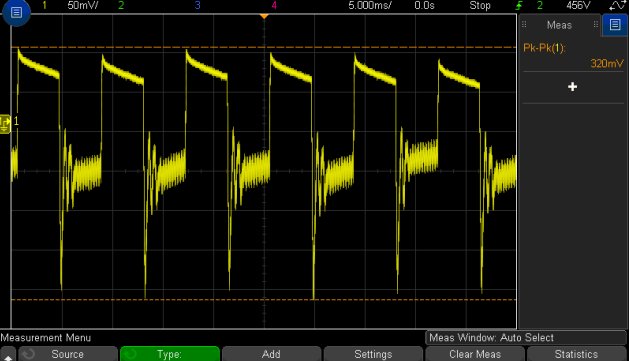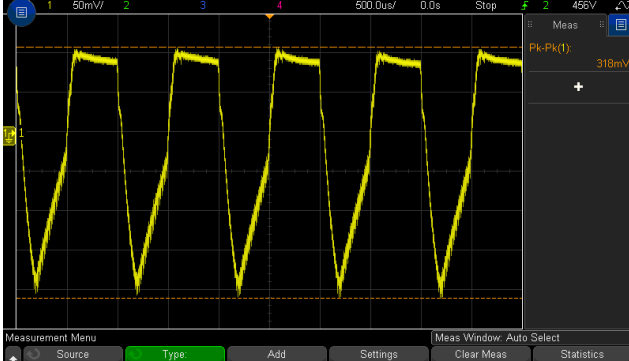
<p>8</p> <p>RISE TIME (Max)</p>	<p>230VAC/30ms 115VAC/30ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 19.66 ms 115VAC/ 19.22 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 	
<p>9</p> <p>HOLD UP TIME (Typ.)</p>	<p>230VAC/50ms 115VAC/12ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 103 ms 115VAC/ 19 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 	
<p>10</p> <p>DYNAMIC LOAD</p>	<p>V1: 2400 mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /HALF LOAD 50%DUTY / 120HZ (2)FULL /HALF LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>320 mVp-p 318 mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~370VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	73V~264V 102VDC~370VDC
			I/P: LOW-LINE-3V=77 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1A 115V/ 1.5 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=0.51A/ 230VAC I=0.88A/ 115VAC
4	LEAKAGE CURRENT	< 100uA / 264VAC	I/P : 264VAC O/P : Min LOAD Ta : 25°C	Touch current : 81.9uA
5	NO LOAD CONSUMPTION	<0.1 W	I/P : 115VAC/230VAC O/P : NO LOAD Ta : 25°C	0.032W/115VAC 0.076W/230VAC
7	EFFICIENCY(Typ.)	93%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.7%


EFFICIENCY vs LOAD

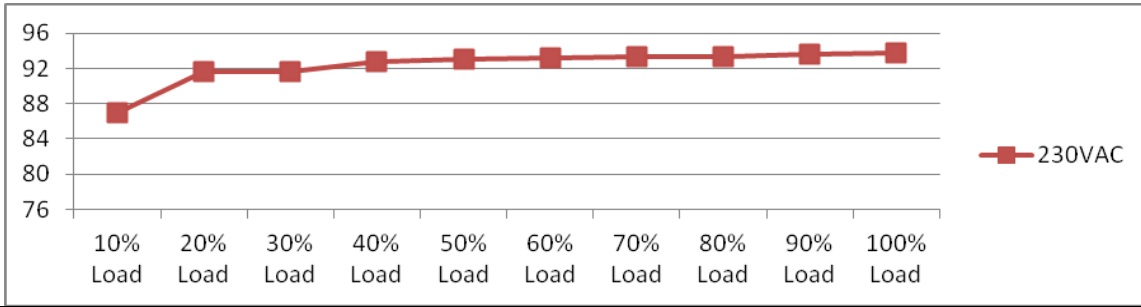

8	INRUSH CURRENT(Typ.)	230V/65A 115V/30A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=57.4A/ 230VAC I=25.1A/ 115VAC
---	----------------------	------------------------------------	--	------------------------------------


INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

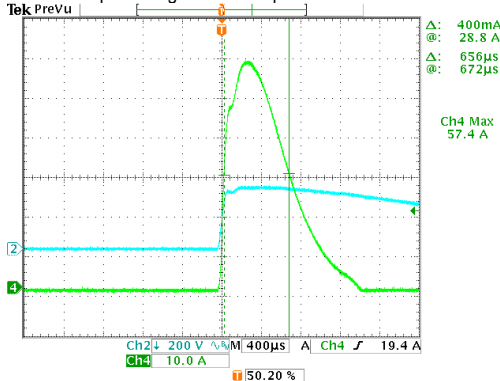

INPUT=115VAC/ 60HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

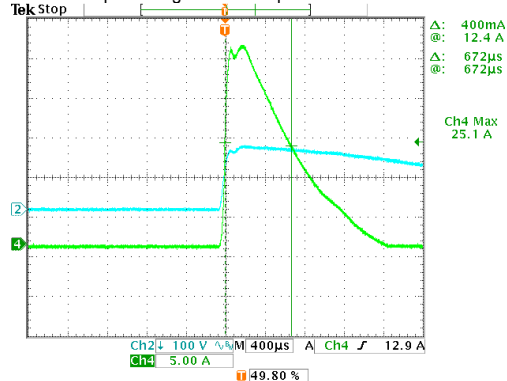

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115%~ 135 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	124.3%/ 264VAC 129.5%/ 230VAC 120.0%/100VAC PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed °
2	OVER VOLTAGE PROTECTION	25.2V~32.4V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	28.0V/ 264VAC 28.0V/ 230VAC 28.0V/ 80VAC PROTECTION TYPE : Shut down O/P voltage ,re-power on to recover.
3	OVER TEMPERATURE PROTECTION	Protection type : Shut down O/P voltage, re-power on to recover.	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down O/P voltage ,re-power on to recover.
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed °

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 7A/ 600 V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. Ta:25°C	VDS: (1) 541V (2) 444V (3) 541V (4) 545V (5) 545V (6) 545V (7) 541V
4	Diode Peak Voltage	Q100 Rated: 27.4A/ 150 V	AC ON/OFF I/P: High-Line +3V =267V O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. (8). NO LOAD Ta:25°C	Q101: VDS: (1) 126V (2) 128V (3) 125.2V (4) 123.6V (5) 123.6V (6) 126V (7) 125.2V (8) 126V

5	Input Capacitor Voltage	C5 Rated: 150 μ / 400 V	I/P:High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1)372V (2) 372V (3) 372V (4) 368V
6	Control IC Voltage Test	PWM IC U2 Rated: -0.3 V~ 30 V O/P IC U100 Rated: -0.3V~ 38 V	AC ON/OFF I/P:High-Line +3V =267V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD (LOW LINE) Ta:25°C	U2 (1)17.2V (2)17.2V (3)17.2V (4)18.8V (5)17.2V U100 (1)15.2V (2)15.2V (3)14.4V (4)18.8V (5)15.2V
9	Clamp Diode Peak Voltage	D1 Rated: 650 V/ 1 A	AC ON/OFF I/P : High-Line +3V = 267V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1)480 V (2)480 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min	I/P-O/P:4.4 KVAC/min Ta:25°C	I/P-O/P:2.481mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω	I/P-O/P: 600 VDC Ta:25°C	I/P-O/P:9999M Ω NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55011 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 <u>MEDICAL</u> AIR: 15KV / Contact: 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
5	E.F.T	EN61000-4-4 MEDICAL INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
6	SURGE	IEC61000-4-5 MEDICAL L-N : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	<input checked="" type="checkbox"/> CRITERIA A <input type="checkbox"/> CRITERIA B
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																								
1	TEMPERATURE RISE TEST	MODEL : MPM-65-48 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 26 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 56 °C																																																																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=26 °C</th> <th>HIGH AMBIENT Ta=56 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>RTH1</td><td>56.6°C</td><td>79.6°C</td></tr> <tr><td>2</td><td>LF1</td><td>53.9°C</td><td>79.6°C</td></tr> <tr><td>3</td><td>LF2</td><td>55.5°C</td><td>82.4°C</td></tr> <tr><td>4</td><td>C1</td><td>50.8°C</td><td>75.1°C</td></tr> <tr><td>5</td><td>BD1</td><td>57.5°C</td><td>84.5°C</td></tr> <tr><td>6</td><td>C5</td><td>55.5°C</td><td>82.3°C</td></tr> <tr><td>7</td><td>Q1</td><td>60.6°C</td><td>87.8°C</td></tr> <tr><td>8</td><td>C11</td><td>54.1°C</td><td>81.4°C</td></tr> <tr><td>9</td><td>RTH2</td><td>55.9°C</td><td>83.3°C</td></tr> <tr><td>10</td><td>T1 coil</td><td>60.2°C</td><td>87.7°C</td></tr> <tr><td>11</td><td>T1 core</td><td>58.6°C</td><td>86°C</td></tr> <tr><td>12</td><td>Q100</td><td>63.5°C</td><td>90.2°C</td></tr> <tr><td>13</td><td>C105</td><td>59.4°C</td><td>86.1°C</td></tr> <tr><td>14</td><td>L100</td><td>47.7°C</td><td>75.4°C</td></tr> <tr><td>15</td><td>D1</td><td>59.9°C</td><td>86.9°C</td></tr> <tr><td>16</td><td>U2</td><td>58.1°C</td><td>85.8°C</td></tr> <tr><td>17</td><td>R5</td><td>57.3°C</td><td>87.2°C</td></tr> <tr><td>18</td><td>C8</td><td>57.5°C</td><td>85.7°C</td></tr> <tr><td>19</td><td>R22</td><td>58.8°C</td><td>85.9°C</td></tr> <tr><td>20</td><td>R21</td><td>57.4°C</td><td>85.1°C</td></tr> <tr><td>21</td><td>U3</td><td>53.9°C</td><td>82.2°C</td></tr> <tr><td>22</td><td>D2</td><td>55.4°C</td><td>84.2°C</td></tr> <tr><td>23</td><td>R11</td><td>54.5°C</td><td>83.1°C</td></tr> <tr><td>24</td><td>Q2</td><td>53.9°C</td><td>82.1°C</td></tr> <tr><td>25</td><td>PCB</td><td>58.5°C</td><td>85.6°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=26 °C	HIGH AMBIENT Ta=56 °C	1	RTH1	56.6°C	79.6°C	2	LF1	53.9°C	79.6°C	3	LF2	55.5°C	82.4°C	4	C1	50.8°C	75.1°C	5	BD1	57.5°C	84.5°C	6	C5	55.5°C	82.3°C	7	Q1	60.6°C	87.8°C	8	C11	54.1°C	81.4°C	9	RTH2	55.9°C	83.3°C	10	T1 coil	60.2°C	87.7°C	11	T1 core	58.6°C	86°C	12	Q100	63.5°C	90.2°C	13	C105	59.4°C	86.1°C	14	L100	47.7°C	75.4°C	15	D1	59.9°C	86.9°C	16	U2	58.1°C	85.8°C	17	R5	57.3°C	87.2°C	18	C8	57.5°C	85.7°C	19	R22	58.8°C	85.9°C	20	R21	57.4°C	85.1°C	21	U3	53.9°C	82.2°C	22	D2	55.4°C	84.2°C	23	R11	54.5°C	83.1°C	24	Q2	53.9°C	82.1°C	25	PCB	58.5°C	85.6°C		
NO	Position	ROOM AMBIENT Ta=26 °C	HIGH AMBIENT Ta=56 °C																																																																																																									
1	RTH1	56.6°C	79.6°C																																																																																																									
2	LF1	53.9°C	79.6°C																																																																																																									
3	LF2	55.5°C	82.4°C																																																																																																									
4	C1	50.8°C	75.1°C																																																																																																									
5	BD1	57.5°C	84.5°C																																																																																																									
6	C5	55.5°C	82.3°C																																																																																																									
7	Q1	60.6°C	87.8°C																																																																																																									
8	C11	54.1°C	81.4°C																																																																																																									
9	RTH2	55.9°C	83.3°C																																																																																																									
10	T1 coil	60.2°C	87.7°C																																																																																																									
11	T1 core	58.6°C	86°C																																																																																																									
12	Q100	63.5°C	90.2°C																																																																																																									
13	C105	59.4°C	86.1°C																																																																																																									
14	L100	47.7°C	75.4°C																																																																																																									
15	D1	59.9°C	86.9°C																																																																																																									
16	U2	58.1°C	85.8°C																																																																																																									
17	R5	57.3°C	87.2°C																																																																																																									
18	C8	57.5°C	85.7°C																																																																																																									
19	R22	58.8°C	85.9°C																																																																																																									
20	R21	57.4°C	85.1°C																																																																																																									
21	U3	53.9°C	82.2°C																																																																																																									
22	D2	55.4°C	84.2°C																																																																																																									
23	R11	54.5°C	83.1°C																																																																																																									
24	Q2	53.9°C	82.1°C																																																																																																									
25	PCB	58.5°C	85.6°C																																																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 134 % LOAD Ta : 25°C	TEST : OK																																																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK																																																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 55 °C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 55 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0089 %/°C (0-50°C)																																																																																																								



6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-30~55°C	1. Thermal shock Temperature : -35°C~ +60°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G (Blank) /5G (ST) 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 2G (Blank) /5G (ST) (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=55 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=55 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=55 °C LIFE TIME	(1) 237571 HRS (2) 37317 HRS (3) 56764 HRS (4) 95221 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 5087.8K hrs min. Telcordia SR-332 (Bellcore) ; 563.4K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		Wangdz

2018.4.30 GP-A50-F010