



TEST REPORT: EPS-120-12

120W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test


■ RELIABILITY TEST

ENVIRONMENT TEST




DESIGN VERIFY TEST
OUTPUT FUNCTION


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 11.40V ~ 12.60V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 10.90V ~ 13.03V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 115VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.75% ~ -1.33%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 115VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.08% ~ -0.34%
4	LOAD REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.75% ~ -0.67%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 1.658 %
	RIPPLE & NOISE(Max)	V1 : 120 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 68 mVp-p
6		<p>high frequency :</p>	<p>low frequency :</p>	
7	SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	I/P : 230VAC I/P : 115VAC INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	230VAC : 236ms 115VAC : 110ms
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 11.0ms 115VAC : 11.6ms

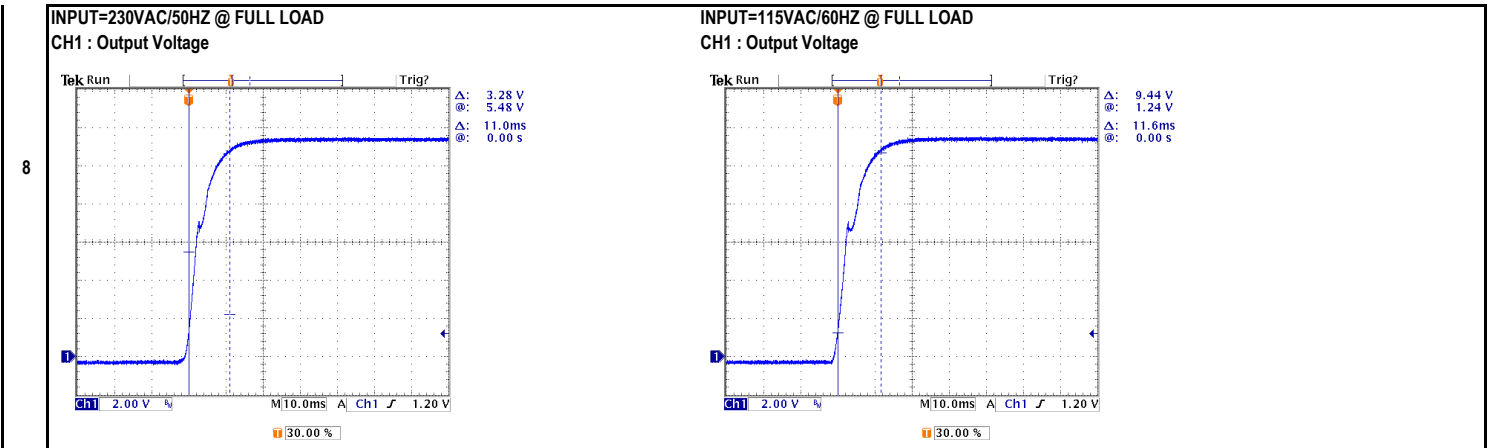

HOLD UP TIME (TYP.)	230VAC	: 50ms	I/P : 230VAC	230VAC	: 61.6ms
	115VAC	: 10ms	I/P : 115VAC	115VAC	: 11.2ms
			O/P: FULL LOAD		
			TA: 25°C		

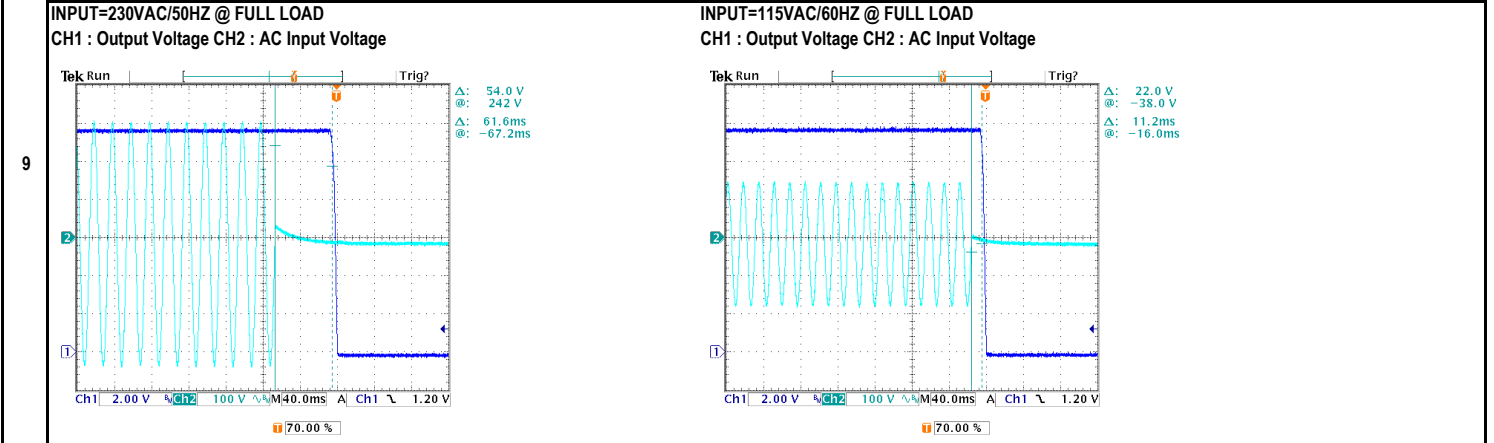


DYNAMIC LOAD	V1 :	1200	mVp-p	I/P : 230VAC			
				O/P:	(1).	(2).	unit:mVp-p
				(1)Full/Min load 50%duty/120HZ	760.0mv	748.0mv	
				(2)Full/Min load 50%duty/1KHZ			
				TA: 25°C			

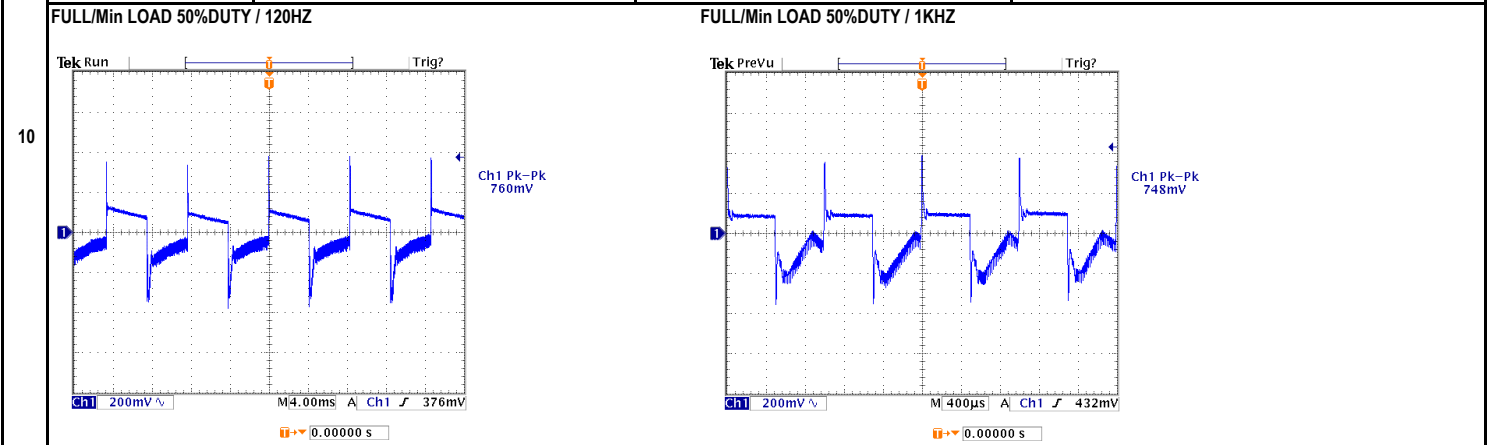





INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC 113VDC ~ 370VDC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	73.0VAC ~ 264VAC 100VDC ~ 370VDC
			I/P : LOW-LINE = 77VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 115VAC ~ 264VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	1.2 / 230VAC 2.1 / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.909 / 230VAC I= 1.82 / 115VAC
4	LEAKAGE CURRENT	< 0.75mA	I/P : 264VAC O/P : MIN LOAD TA : 25°C	L-FG: 0.0462 mA N-FG: 0.0468 mA O/P-FG: 0.0684 mA
5	NO LOAD POWER CONSUMPTION	< 0.30W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.1825 W
	EFFICIENCY (TYP.)	88.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	88.09 %

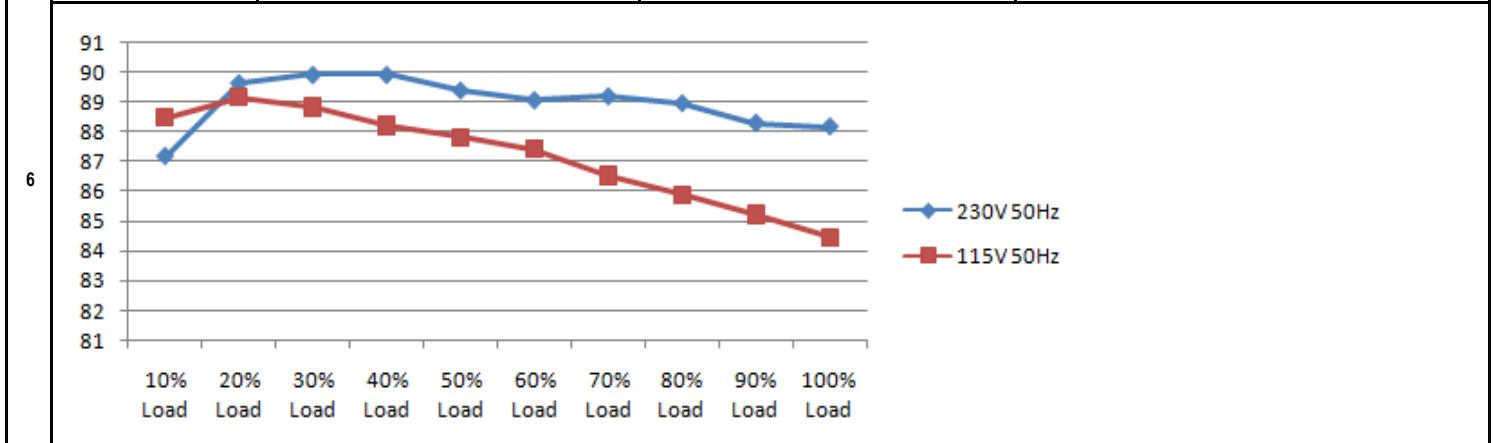

7	INRUSH CURRENT (TYP.)	60A / 230VAC 30A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 55.40A / 230VAC I= 25.80A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage	INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage	

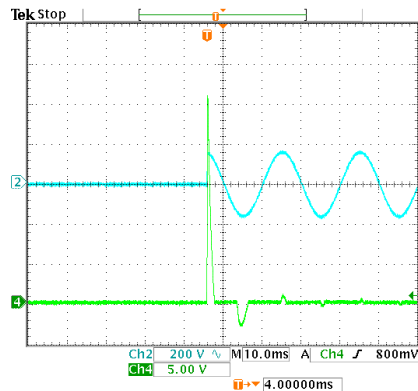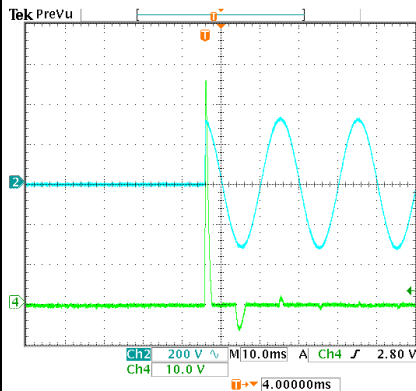



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING TA : 25°C	129.7% 264VAC 131.6% 230VAC 125.0% 115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	13.20V ~ 15.60V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD TA : 25°C	14.20V 264VAC 14.30V 230VAC 14.40V 80VAC Shut down Re- power ON
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, Re-power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	AUXILIARY POWER	12V / 0.5A Tolerance: -15~10 %	I/P: 230VAC O/P: FULL LOAD TA : 25°C	9.55 V/ 0.5 A Tolerance: -1.07 %

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 16.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 564.00V (2). 532.00V (3). 560.00V
2	Input Capacitor	C5 Rated : 180uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 372.00V (2). 370.00V (3). 374.00V
3	Control IC	U1 Rated : 26.0V (max) 9.0V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 16.30V (2). 12.30V (3). 16.00V (4). 16.20V (5). 12.40V
4	O/P Diode (MOSFET)	Q101 Rated : 100V 97.0A	I/P : 267VAC O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1). 67.60V (2). 71.60V (3). 67.20V
5	Clamp Diode	D5 Rated : 600V 3.0A	I/P : 267VAC O/P : (1)Full load continue Ta : 25°C	(1). 440.00V



SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.000KVAC /min I/P-FG : 2.000KVAC /min O/P-FG : 0.500KVAC /min	I/P-O/P: 3.600KVAC /min I/P-FG: 2.400KVAC /min O/P-FG: 0.600KVAC /min Ta : 25°C	I/P-O/P: 1.91mA I/P-FG: 2.32mA O/P-FG: 1.07mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P: 500VDC I/P-FG: 500VDC O/P-FG: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 2KV;L/N-PE: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																								
1	TEMPERATURE RISE TEST	MODEL : EPS-120-12 1. ROOM AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 23.5°C 2. HIGH AMBIENT BURN-IN : 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 45.0°C																																																										
			<table border="1"> <thead> <tr> <th>NO.</th> <th>Position</th> <th>ROOM AMBIENT 23.5°C</th> <th>HIGH AMBIENT Ta: 45.0°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>42.1°C</td><td>53.2°C</td></tr> <tr><td>2</td><td>LF2</td><td>59.8°C</td><td>70.8°C</td></tr> <tr><td>3</td><td>BD1</td><td>66.5°C</td><td>77.1°C</td></tr> <tr><td>4</td><td>Q1</td><td>69.5°C</td><td>79.8°C</td></tr> <tr><td>5</td><td>C5</td><td>64.2°C</td><td>74.6°C</td></tr> <tr><td>6</td><td>D5</td><td>64.2°C</td><td>74.9°C</td></tr> <tr><td>7</td><td>T1</td><td>78.4°C</td><td>90.1°C</td></tr> <tr><td>8</td><td>C105</td><td>76.1°C</td><td>96.5°C</td></tr> <tr><td>9</td><td>C106</td><td>66.0°C</td><td>86.5°C</td></tr> <tr><td>10</td><td>L100</td><td>74.5°C</td><td>86.3°C</td></tr> <tr><td>11</td><td>Q101</td><td>83.1°C</td><td>96.7°C</td></tr> <tr><td>12</td><td>U1</td><td>68.5°C</td><td>78.8°C</td></tr> <tr><td>13</td><td>RTH3</td><td>66.8°C</td><td>77.2°C</td></tr> </tbody> </table>	NO.	Position	ROOM AMBIENT 23.5°C	HIGH AMBIENT Ta: 45.0°C	1	LF1	42.1°C	53.2°C	2	LF2	59.8°C	70.8°C	3	BD1	66.5°C	77.1°C	4	Q1	69.5°C	79.8°C	5	C5	64.2°C	74.6°C	6	D5	64.2°C	74.9°C	7	T1	78.4°C	90.1°C	8	C105	76.1°C	96.5°C	9	C106	66.0°C	86.5°C	10	L100	74.5°C	86.3°C	11	Q101	83.1°C	96.7°C	12	U1	68.5°C	78.8°C	13	RTH3	66.8°C	77.2°C	
NO.	Position	ROOM AMBIENT 23.5°C	HIGH AMBIENT Ta: 45.0°C																																																									
1	LF1	42.1°C	53.2°C																																																									
2	LF2	59.8°C	70.8°C																																																									
3	BD1	66.5°C	77.1°C																																																									
4	Q1	69.5°C	79.8°C																																																									
5	C5	64.2°C	74.6°C																																																									
6	D5	64.2°C	74.9°C																																																									
7	T1	78.4°C	90.1°C																																																									
8	C105	76.1°C	96.5°C																																																									
9	C106	66.0°C	86.5°C																																																									
10	L100	74.5°C	86.3°C																																																									
11	Q101	83.1°C	96.7°C																																																									
12	U1	68.5°C	78.8°C																																																									
13	RTH3	66.8°C	77.2°C																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 127% LOAD Ta : 25°C	TEST : OK																																																								
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 115VAC O/P : FULL LOAD Ta : -30.0°C	TEST : OK																																																								



4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45°C NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 45°C HUMIDITY= 95.0% RH	TEST : OK
5	TEMPERATURE COEFFICIENT	±0.03% (0°C~50°C)	I/P : 230VAC O/P : FULL LOAD	±0.0038% (0°C~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec		TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45.0°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45.0°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45.0°C LIFE TIME		(1). 140948.4 HRS (2). 14103.6 HRS (3). 28119.6 HRS (4). 158118 HRS
10	MTBF	3746.9K hrs min. Telcordia SR-332 (Bellcore) ; 491.2K hrs min. MIL-HDBK-217F (25°C)		
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 45°C		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

12.10.30 A50-F031