



Test Report: HVGC-240-3500

240W Single Output LED Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT ACCURACY	±5%	I/P: 347VAC I/P: 480VAC O/P: FULL LOAD Ta: 25°C	3.543 A /347VAC@CV MAX-1V 3.542A /347VAC@CV MIN 3.546A/480VAC@CV MAX-1V 3.543A/480VAC@CV MIN
2	CONSTANT CURRENT REGION	CH1: 34.3V~ 68.6V	I/P: 347VAC O/P: FULL LOAD Ta: 25°C	0.384V~68.6V/347VAC
3	CURRENT ADJ. RANGE	CH1: 1750mA~ 3500mA	I/P: 347VAC I/P: 480VAC O/P: CV MIN & CV MAX-1V Ta: 25°C	1.526A~3.748A /347VAC@CV MAX-1V 1.528A~3.746A /347VAC@CV MIN 1.526A~3.749A/480VAC@CV MAX-1V 1.532A~3.746A/480VAC@CV MIN
4	OPEN CIRCUIT VOLTAGE (max.)	71V	I/P: 347VAC O/P: NO LOAD Ta: 25°C	69.6V
5	CURRENT RIPPLE	5.0% max. @rated current	I/P: 347VAC O/P: FULL LOAD Ta: 25°C	2.14%
6	OVER/UNDERSHOOT TEST	< ±5%	I/P: 347 VAC O/P: FULL LOAD Ta: 25°C	TEST: < 5 %
7	SET UP TIME	230VAC/ 500 ms (Max) 347VAC/ 500 ms (Max) 480VAC/ 500 ms (Max)	I/P: 230VAC I/P: 347VAC I/P: 480VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 297 ms 347VAC/ 279 ms 480VAC/ 280ms
		<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> <p>DSO-X 3014A, M152161490 Thu Sep 03 17:23:44 2015</p> <p>1 20.0V/ 2 500V/ 3 4 50.00µs/ 停止</p> <p>-893.0µ 50.00µs/ 停止</p> <p>+62.5000V 10.0:1 DC -6.25V 1000:1 DC -775.00mV 1.00:1 DC +4.02500A 10.0:1</p> </div> <div style="width: 45%;"> <p>INPUT=347VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> <p>DSO-X 3014A, M152161490 Thu Sep 03 17:24:53 2015</p> <p>1 20.0V/ 2 500V/ 3 4 50.00µs/ 停止</p> <p>-796.0µ 50.00µs/ 停止</p> <p>+62.5000V 10.0:1 DC -6.25V 1000:1 DC -775.00mV 1.00:1 DC +4.02500A 10.0:1</p> </div> </div>		
8	DIMMING OPERATION (for B-Type)	<p>※3 in 1 dimming function</p> <p>※Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.</p> <p>※Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.</p> <p>※Dimming source current from power supply: 100µ A (typ.)</p>		

◎ Applying additive 0 ~ 10VDC

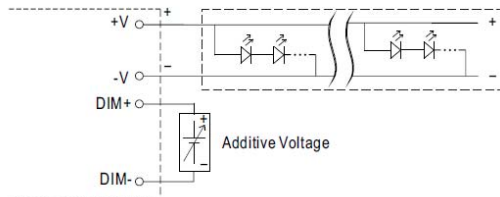


"DO NOT connect "DIM- to -V"

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):



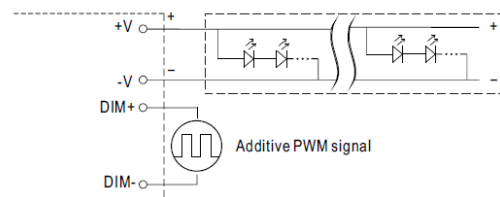


"DO NOT connect "DIM- to -V"

◎ Applying additive resistance:

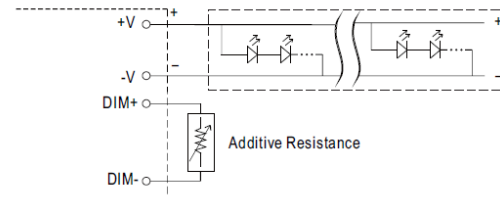

"DO NOT connect "DIM- to -V"

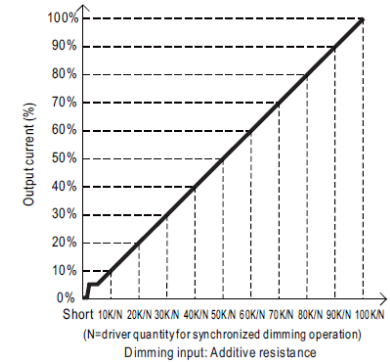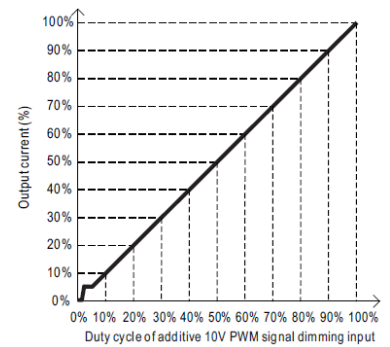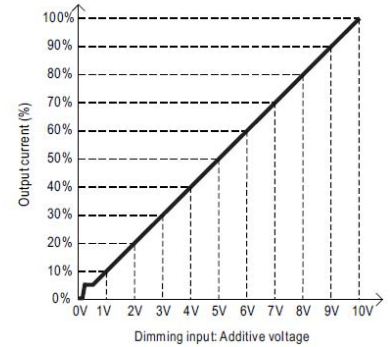

Note : 1. Min. dimming level is about 5% and the output current is not defined when $0\% < I_{out} < 5\%$.
 2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P : 347VAC
 O/P : DIMMING TEST
 TA : 25°C

R	SHORT	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
O/P CURRENT	0.00000A	0.406A	0.746A	1.120A	1.424A	1.761A	2.099A	2.444A	2.778A	3.122A	3.443A	3.666A
%	0.00%	11.60%	21.32%	32.00%	40.67%	50.30%	59.96%	69.83%	79.37%	89.19%	98.38%	104.74%
V	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
O/P CURRENT	0.00000A	0.410A	0.761A	1.107A	1.439A	1.797A	2.125A	2.464A	2.819A	3.151A	3.507A	3.666A
%	0.00%	11.73%	21.75%	31.63%	41.12%	51.35%	60.71%	70.41%	80.53%	90.02%	100.20%	104.74%
PWM (100HZ)	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
O/P CURRENT	0.00000A	0.341A	0.686A	1.034A	1.376A	1.723A	2.064A	2.411A	2.752A	3.095A	3.433A	3.666A
%	0.00%	9.75%	19.59%	29.53%	39.30%	49.22%	58.97%	68.89%	78.63%	88.44%	98.09%	104.74%


TEST RESULT : OK

9 DIMMING OPERATION
(for Dxx-Type by User definition)

※Smart timer dimming function (for Dxx-Type by User definition)

MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details.


Ex: Ⓒ D01-Type: the profile recommended for residential lighting

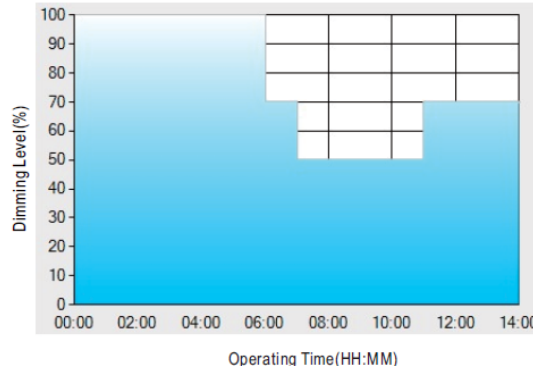

Set up for D01-Type in Smart timer dimming software program:

	T1	T2	T3	T4
TIME**	06:00	07:00	11:00	---
LEVEL**	100%	70%	50%	70%


Ex: Ⓒ D02-Type: the profile recommended for street lighting

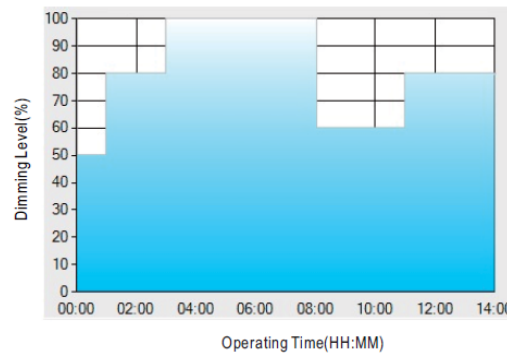

Set up for D02-Type in Smart timer dimming software program:

	T1	T2	T3	T4	T5
TIME**	01:00	03:00	8:00	11:00	---
LEVEL**	50%	80%	100%	60%	80%

Ex: Ⓒ D03-Type: the profile recommended for tunnel lighting

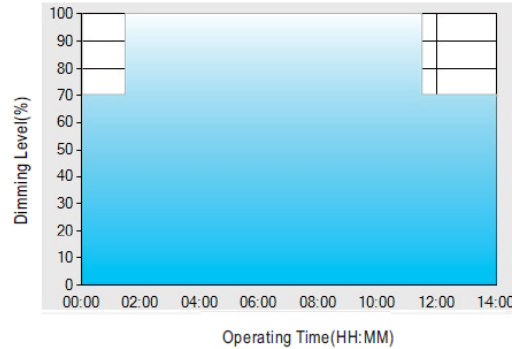

Set up for D03-Type in Smart timer dimming software program:

	T1	T2	T3
TIME**	01:30	11:00	---
LEVEL**	70%	100%	70%

I/P : 347VAC
O/P : DIMMING TEST
TA : 25°C
TEST RESULT : OK


INPUT FUNCTION TEST



240W Single Output LED Power Supply **HVGC-240** series


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~528 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	147V~528V
			I/P: LOW-LINE-3V=177 V HIGH-LINE+10V=538 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1).TEST:OK (2).TEST :OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~528VAC O/P:FULL~MIN LOAD Ta:25°C	OK
3	INPUT CURRENT (TYP)	347VAC/ 0.76 A 480VAC/ 0.56 A	I/P: 347VAC/480VAC O/P:FULL LOAD Ta:25°C	I = 0.752A/ 347VAC I = 0.552A/ 480VAC
4	POWER FACTOR(TYP)	0.95/347VAC FULL LOAD 0.93/480VAC FULL LOAD 0.97/277 VAC FULL LOAD 0.98/230 VAC FULL LOAD	I/P: 347VAC/480VAC/277VAC/230VAC O/P:FULL LOAD Ta:25°C	PF= 0.987/347V/100%LOAD PF= 0.964 /480V/100%LOAD PF= 0.942/277V/100%LOAD PF= 0.996/230V/100%LOAD

P.F vs LOAD

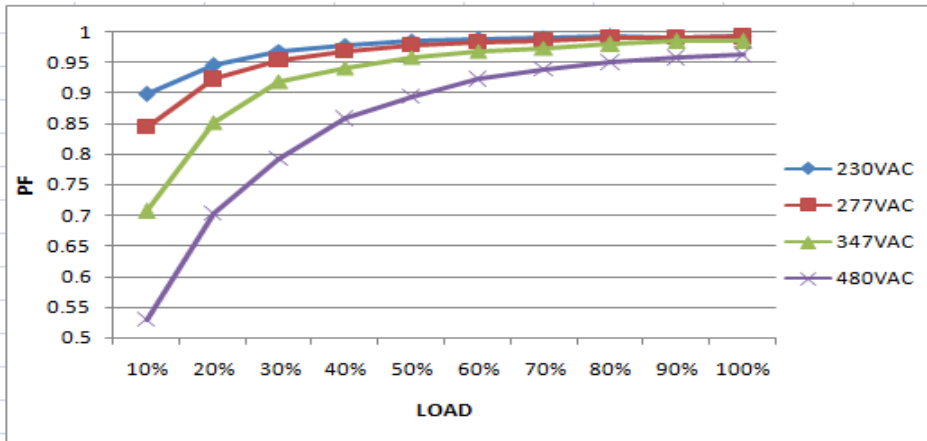


5	EFFICIENCY (TYP)	92.5%	I/P: 347VAC O/P:FULL LOAD Ta:25°C	93.03 %
---	------------------	-------	---	---------


EFFICIENCY vs LOAD

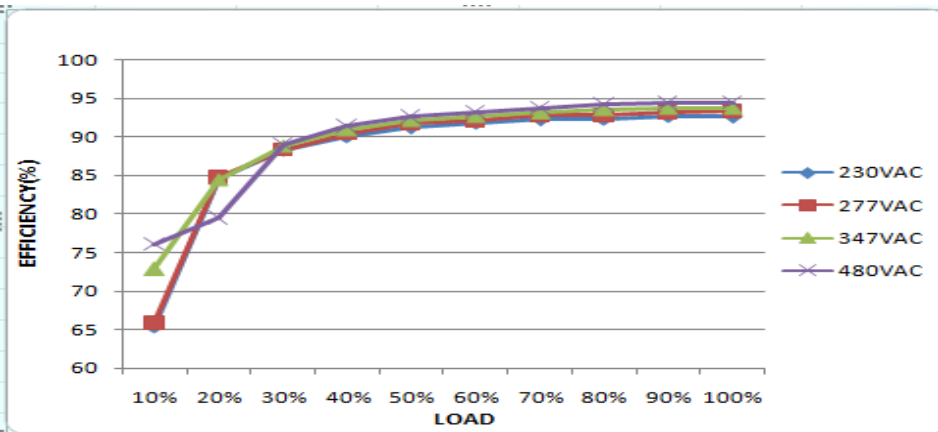

6	INRUSH CURRENT (TYP)	480VV/ 50 A COLD START (twidth=532us measured at 50% Ipeak) COLD START	I/P:480VAC O/P:FULL LOAD Ta:25°C	I = 40.9A/ 480VAC T50= 520 us
	INPUT=480VAC/ 60HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A) D50-X-3014A, M152161400 Wed Sep 09 11:38:24 2015			

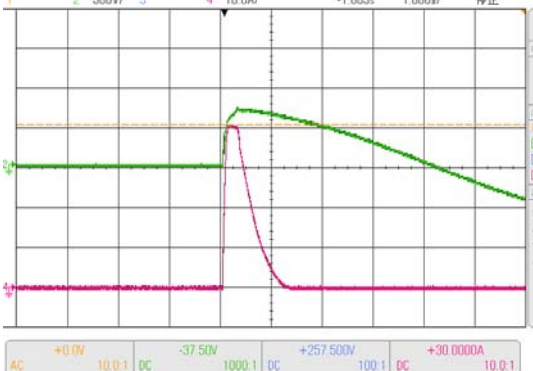

7	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be lower than 20% when output loading is 50% or higher at 230V/277V/347V/480V	I/P : 230V/277V/347V O/P : 100% LOAD 50% LOAD I/P : 480V O/P : 60% LOAD Ta : 25°C	THD : 7.38%/230V 50% THD : 7.88%/230V 100% THD : 7.63%/277V 50% THD : 9.77%/277V 100% THD : 9.61%/347V 50% THD : 6.71%/347V 100% THD : 13.43%/480V 60% THD : 8.21%/480V 100%
	THD vs LOAD			

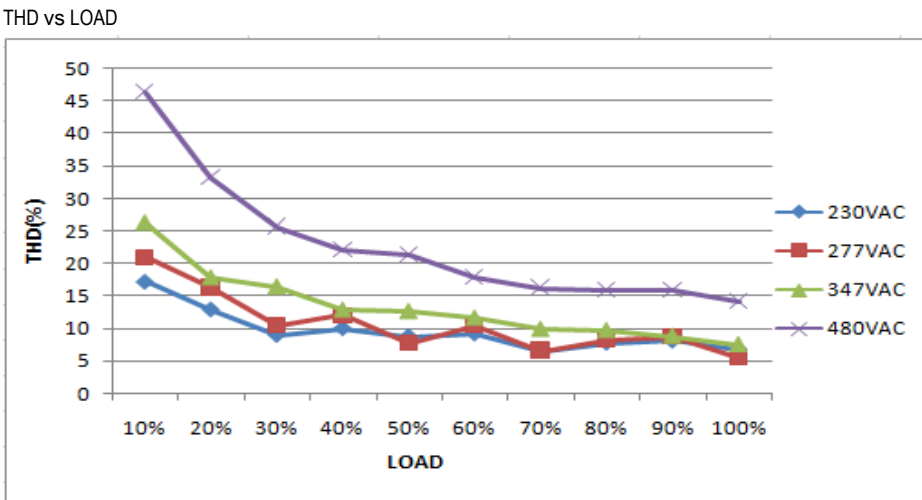

ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
2	OVER VOLTAGE PROTECTION	V1: 72 V~ 79 V	I/P: 528VAC I/P: 347VAC I/P: 180VAC O/P: MIN LOAD Ta: 25°C	75.43V/ 528VAC 75.39V/ 347VAC 75.3V/ 180VAC PROTECTION TYPE : Shut down o/p voltage with re-power on to recovery
3	OVER TEMPERATURE PROTECTION	PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover	I/P: 528 VAC I/P: 180 VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover

4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 528VAC I/P: 180 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed
---	------------------	--	--	--

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q901 Rated 9A/ 950V	I/P: High-Line +3V =531V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Full Load continue Ta:25°C	VDS: (1) 836V/6.28A (2) 836V/6.68A (3) 820V/2.96A
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 6A/1050V	I/P: High-Line +3V =531V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Full Load continue Ta:25°C	VDS: (1) 912V/3.91A (2) 824V/3.73A (3) 840V/3.77A
3	Diode Peak Voltage	D101 Rated 20A/ 200V	I/P: High-Line +3V =531 V D101 : AC ON/OFF O/P: (1) Full Load (2) Output Short (3) Full Load continue Ta:25°C	VDS: (1) 154V (2) 41.6V (3) 154V
4	Input Capacitor Voltage	C6 Rated: 82u/450V	I/P: High-Line +3V =531V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 379V (2) 411V (3) 379V (4) 359V
5	Control IC Voltage Test	PWM IC U901 Rated 8.85V~16V	I/P: High-Line +3V =531 V AC ON/OFF O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. Ta:25°C	(1) 14.93V (2) 14.21V (3) 14.29V (4) 12.84V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 2.6mA I/P-FG: 1.08 mA O/P-FG: 0.7mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 30 GΩ I/P-FG: 18.1 GΩ O/P-FG: 30 GΩ NO DAMAGE

3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	21mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75mA / 480VAC	I/P: 480 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.16 mA N-FG: 0.16mA L,N -V(+): 0.18mA L,N-V(-): 0.17mA

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONDUCTION	FCC Part 15 Subpart B	I/P: 440VAC (60HZ) O/P:FULL/30% LOAD Ta:25°C	PASS Test by certified Lab
2	RADIATION	FCC Part 15 Subpart B	I/P: 480VAC (60HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
4	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : HVGC-240-3500 1. ROOM AMBIENT BURN-IN : 15 HRS I/P : 347VAC O/P : FULL LOAD Ta= 25.5 °C 2. HIGH AMBIENT BURN-IN : 3.5 HRS I/P : 347VAC O/P : FULL LOAD Ta= 56.3 °C		

		CH.	Position	ROOM AMBIENT	HIGH AMBIENT
				Ta= 25.5 °C	Ta= 56.3 °C
		1	C1	58.5°C	91.3°C
		2	BD1	61.1°C	94.2°C
		3	L2	59.8°C	93.0°C
		4	C10	60.3°C	93.2°C
		5	C11	62.1°C	93.9°C
		6	Q2	63.0°C	97.0°C
		7	RTH2	73.6°C	103.8°C
		8	Q901	61.7°C	97.6°C
		9	T2	63.1°C	97.5°C
		10	L1	60.9°C	94.4°C
		11	C5	61.0°C	94.5°C
		12	ZNR1	55.5°C	87.7°C
		13	Q35	61.2°C	95.2°C
		14	C46	60.8°C	94.7°C
		15	C54	59.2°C	92.3°C
		16	RTH3	59.2°C	92.7°C
		17	U901	58.7°C	92.0°C
		18	T1	71.9°C	104.3°C
		19	D100	64.2°C	96.4°C
		20	C106	60.7°C	93.3°C
		21	C201	52.5°C	86.2°C
		22	LF100	57.7°C	90.2°C
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 528VAC/180VAC O/P : 100 % LOAD Ta= -45°C	TEST : OK
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE		I/P : 538VAC O/P : FULL LOAD Ta= 60 °C HUMIDITY= 95%R.H	TEST : OK
4	TEMPERATURE COEFFICIENT	± 0.03%/°C (0~60°C)		I/P : 347 VAC O/P : FULL LOAD	± 0%/°C (0~60°C)
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -50°C~ +125°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC			OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test			OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 70min in each axis (X.Y.Z) (6) Ta : 25°C			TEST : OK



240W Single Output LED Power Supply **HVGC-240** series

8	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 347VAC O/P : FULL LOAD Tc= 80 °C LIFE TIME (2) I/P : 347VAC O/P : 75% LOAD Tc= 80 °C LIFE TIME (3) I/P : 347VAC O/P : 50% LOAD Tc= 80 °C LIFE TIME	(1) 76112 HRS (2) 80073 HRS (3) 83521HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 143.6K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT ZENG

12.10.30 A50-F031