



# Test Report: LRS-200-4.2

---

200W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY TEST



## ■ RELIABILITY TEST

ENVIRONMENT TEST



## DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 3.6~4.4V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	3.464V~4.679V/230VAC 3.471V~4.677V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -4%~4%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:- 0.24%~ 0.24%
3	LINE REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.24%~-0.24%
4	LOAD REGULATION(Max)	V1:-2.5%~ 2.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.0%~0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 114mVp-p

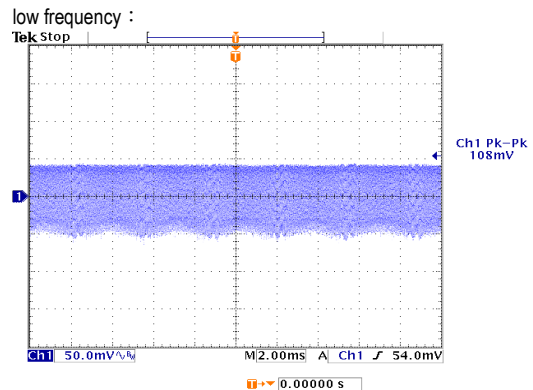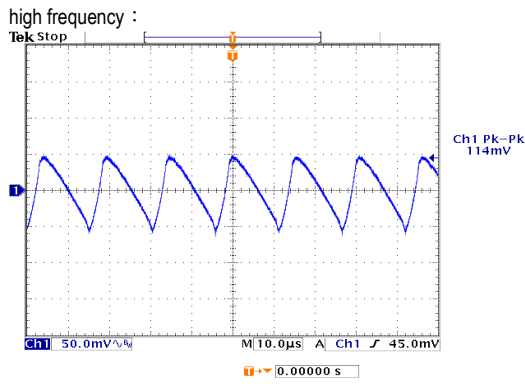

7	SET UP TIME(Max)	230VAC/1500ms 115VAC/ 1500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 968ms 115VAC/ 1058ms
---	------------------	---------------------------------	--	---------------------------------

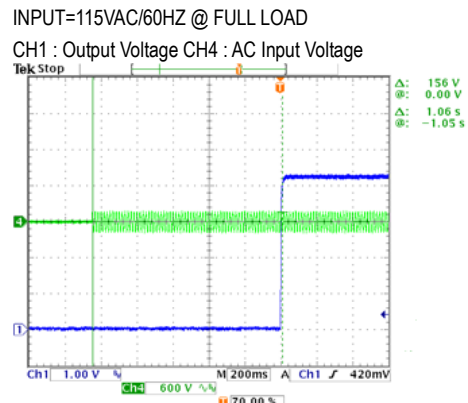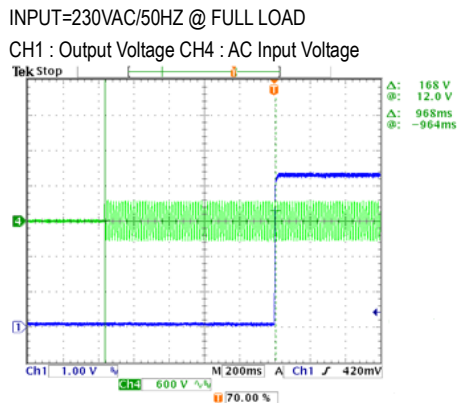



200W Single Output Switching Power Supply



LRS-200 series

8	RISE TIME (Max)	230VAC/ 50ms 115VAC/ 50ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 1.60ms 115VAC/1.60ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage		CH1 : Output Voltage		
9	HOLD UP TIME(Typ )	230VAC/ 16ms 115VAC/ 12ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/34.4ms 115VAC/ 29.6ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage CH4 : AC Input Voltage		CH1 : Output Voltage CH4 : AC Input Voltage		
10	DYNAMIC LOAD	V1: 840mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	540mVp-p 496mVp-p
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ		



INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90 ~ 132VAC / 180 ~ 264VAC by switch 240 ~ 370VDC (switch on 230VAC)	I/P:TESTING O/P:FULL LOAD Ta:25°C  I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS ( POWER ON/OFF NO DAMAGE )	79V~132V 130V~264V 228VDC ~ 370VDC(switch on 230VAC)  TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~264 VAC 90 VAC ~132 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 2.2A 115V/ 4A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =1.71A/ 230VAC I =3.16A/ 115VAC
4	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.433mA N-FG: 0.433mA
5	NO LOAD CONSUMPTION	< 0.75 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	< 0.55W < 0.47 W
6	INRUSH CURRENT(Typ)	230V/ 60A 115V/ 60A COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =52.4A/ 230VAC I =46.8A/ 115VAC

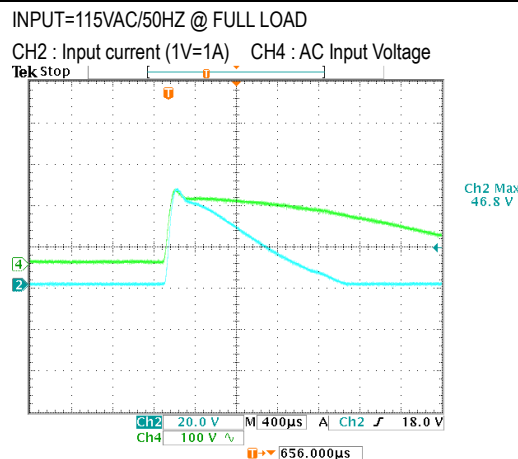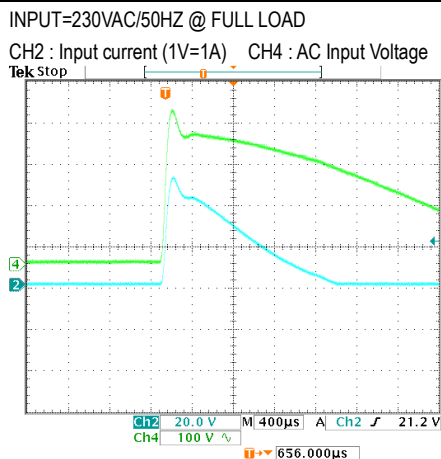



200W Single Output Switching Power Supply

LRS-200 series

7	EFFICIENCY(Typ)	86%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	86.82%																																	
<p>效率随负载</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>Load (%)</th> <th>230V60HZ Efficiency (%)</th> <th>115V60HZ Efficiency (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>76</td><td>76</td></tr> <tr><td>20%</td><td>84</td><td>84</td></tr> <tr><td>30%</td><td>87</td><td>87</td></tr> <tr><td>40%</td><td>88</td><td>88</td></tr> <tr><td>50%</td><td>88</td><td>88</td></tr> <tr><td>60%</td><td>88</td><td>88</td></tr> <tr><td>70%</td><td>87</td><td>87</td></tr> <tr><td>80%</td><td>86</td><td>86</td></tr> <tr><td>90%</td><td>86</td><td>86</td></tr> <tr><td>100%</td><td>86</td><td>86</td></tr> </tbody> </table>					Load (%)	230V60HZ Efficiency (%)	115V60HZ Efficiency (%)	10%	76	76	20%	84	84	30%	87	87	40%	88	88	50%	88	88	60%	88	88	70%	87	87	80%	86	86	90%	86	86	100%	86	86
Load (%)	230V60HZ Efficiency (%)	115V60HZ Efficiency (%)																																			
10%	76	76																																			
20%	84	84																																			
30%	87	87																																			
40%	88	88																																			
50%	88	88																																			
60%	88	88																																			
70%	87	87																																			
80%	86	86																																			
90%	86	86																																			
100%	86	86																																			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %~ 140 %	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	128.27%/ 230VAC 127.87%/115VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH:4.6V~5.4V	5.1V/ 230VAC 5.2V/115VAC O/P:MIN LOAD Ta:25°C	Hiccup mode, recovers automatically after fault condition is removed
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P:FULL LOAD	O.T.P. Active Hiccup mode, recovers automatically after fault condition is removed
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

## COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (C to E) <b>Peak Voltage</b>	Q 1 Rated 13A/600V	I/P:High-Line +3V =267V O/P: (1)Full Load Turn on (2)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (3)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1)530V (2)538V (3)526V
2	<b>Diode Peak Voltage</b>	Q102 Rated 120A/40V  Q103 Rated 120A/40V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2)Output Short Ta:25°C	Q102: (1)35.4V (2)33.4V  Q103: (1)30.0V (2)29.4V
3	<b>Input Capacitor Voltage</b>	C5 Rated: 330 $\mu$ / 200V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)178V (2)177V (3)180V
4	<b>Control IC Voltage Test</b>	PWM IC U1 Rated 28 V (MAX.) 10V (MIN.)	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Output short (3)No load VR ( min ) Ta:25°C	U1 (1) 21.6V (2) 19.5V (3) 20.7V

## SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75 KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P:2.3 mA I/P-FG: 2.45mA O/P-FG: 2.75m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M $\Omega$ I/P-FG: 500VDC>100M $\Omega$ O/P-FG:500VDC>100M $\Omega$	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999M $\Omega$ I/P-FG: 9999M $\Omega$ O/P-FG: 9999M $\Omega$ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m $\Omega$	40A / 2min Ta:25°C	20 m $\Omega$

## E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONDUCTION	EN55032 CLASS A	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
2	RADIATION	EN55032 CLASS A	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
4	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

## RELIABILITY TEST

### ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																
1	TEMPERATURE RISE TEST	MODEL: LRS-200-5 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=24.7°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=40.1°C																																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 24.7 °C</th> <th>HIGH AMBIENT Ta=40.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>U1</td><td>63.9°C</td><td>76.7°C</td></tr> <tr><td>2</td><td>U100</td><td>71.1°C</td><td>82.8°C</td></tr> <tr><td>3</td><td>LF1</td><td>55.4°C</td><td>69.6°C</td></tr> <tr><td>4</td><td>BD1</td><td>59.2°C</td><td>72.1°C</td></tr> <tr><td>5</td><td>ZNR5</td><td>59.0°C</td><td>73.0°C</td></tr> <tr><td>6</td><td>C5</td><td>59.2°C</td><td>73.3°C</td></tr> <tr><td>7</td><td>C6</td><td>57.7°C</td><td>71.9°C</td></tr> <tr><td>8</td><td>T2</td><td>62.2°C</td><td>76.2°C</td></tr> <tr><td>9</td><td>Q1</td><td>66.7°C</td><td>82.4°C</td></tr> <tr><td>10</td><td>Q2</td><td>66.9°C</td><td>82.6°C</td></tr> <tr><td>11</td><td>D11</td><td>63.2°C</td><td>77.8°C</td></tr> <tr><td>12</td><td>D10</td><td>65.3°C</td><td>82.2°C</td></tr> <tr><td>13</td><td>T1coil</td><td>95.4°C</td><td>109.3°C</td></tr> <tr><td>14</td><td>T1core</td><td>78.2°C</td><td>91.8°C</td></tr> <tr><td>15</td><td>C36</td><td>61.7°C</td><td>76.6°C</td></tr> <tr><td>16</td><td>RTH3</td><td>88.5°C</td><td>102.7°C</td></tr> <tr><td>17</td><td>L100</td><td>90.2°C</td><td>104.4°C</td></tr> <tr><td>18</td><td>C106</td><td>79.7°C</td><td>95.5°C</td></tr> <tr><td>19</td><td>C201</td><td>67.8°C</td><td>80.2°C</td></tr> <tr><td>20</td><td>L101</td><td>77.6°C</td><td>89.7°C</td></tr> <tr><td>21</td><td>Q101</td><td>77.2°C</td><td>91.9°C</td></tr> <tr><td>22</td><td>Q103</td><td>69.3°C</td><td>83.5°C</td></tr> <tr><td>23</td><td>Q104</td><td>64.7°C</td><td>78.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 24.7 °C	HIGH AMBIENT Ta=40.1 °C	1	U1	63.9°C	76.7°C	2	U100	71.1°C	82.8°C	3	LF1	55.4°C	69.6°C	4	BD1	59.2°C	72.1°C	5	ZNR5	59.0°C	73.0°C	6	C5	59.2°C	73.3°C	7	C6	57.7°C	71.9°C	8	T2	62.2°C	76.2°C	9	Q1	66.7°C	82.4°C	10	Q2	66.9°C	82.6°C	11	D11	63.2°C	77.8°C	12	D10	65.3°C	82.2°C	13	T1coil	95.4°C	109.3°C	14	T1core	78.2°C	91.8°C	15	C36	61.7°C	76.6°C	16	RTH3	88.5°C	102.7°C	17	L100	90.2°C	104.4°C	18	C106	79.7°C	95.5°C	19	C201	67.8°C	80.2°C	20	L101	77.6°C	89.7°C	21	Q101	77.2°C	91.9°C	22	Q103	69.3°C	83.5°C	23	Q104	64.7°C	78.9°C
NO	Position	ROOM AMBIENT Ta= 24.7 °C	HIGH AMBIENT Ta=40.1 °C																																																																																																	
1	U1	63.9°C	76.7°C																																																																																																	
2	U100	71.1°C	82.8°C																																																																																																	
3	LF1	55.4°C	69.6°C																																																																																																	
4	BD1	59.2°C	72.1°C																																																																																																	
5	ZNR5	59.0°C	73.0°C																																																																																																	
6	C5	59.2°C	73.3°C																																																																																																	
7	C6	57.7°C	71.9°C																																																																																																	
8	T2	62.2°C	76.2°C																																																																																																	
9	Q1	66.7°C	82.4°C																																																																																																	
10	Q2	66.9°C	82.6°C																																																																																																	
11	D11	63.2°C	77.8°C																																																																																																	
12	D10	65.3°C	82.2°C																																																																																																	
13	T1coil	95.4°C	109.3°C																																																																																																	
14	T1core	78.2°C	91.8°C																																																																																																	
15	C36	61.7°C	76.6°C																																																																																																	
16	RTH3	88.5°C	102.7°C																																																																																																	
17	L100	90.2°C	104.4°C																																																																																																	
18	C106	79.7°C	95.5°C																																																																																																	
19	C201	67.8°C	80.2°C																																																																																																	
20	L101	77.6°C	89.7°C																																																																																																	
21	Q101	77.2°C	91.9°C																																																																																																	
22	Q103	69.3°C	83.5°C																																																																																																	
23	Q104	64.7°C	78.9°C																																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P: 230 VAC O/P: 125% LOAD Ta: 25°C	TEST: OK																																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 %LOAD Ta= -25 °C	TEST: OK																																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST: OK																																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.008%/°C (0~50°C)																																																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																																																





200W Single Output Switching Power Supply

# LRS-200 series

7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C ~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=40 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 40 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 40 °C LIFE TIME	(1) 65146HRS (2) 22444HRS (3) 81836HRS (4) 207180HRS
10	MTBF	2346.6K hrs min. Telcordia SR-332 (Bellcore) ; 279.4Khrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ