



# Test Report: NPF-120-42

---

120W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

Environment Test

■ DESIGN VERIFY TEST

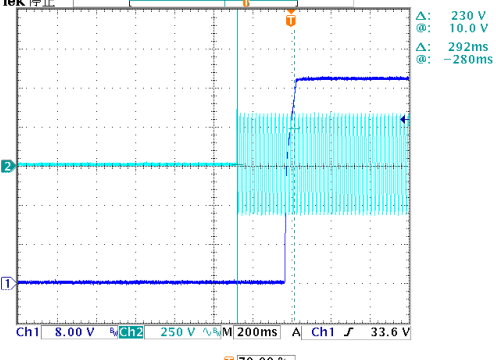
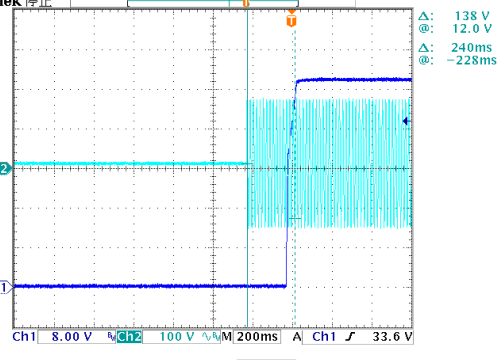
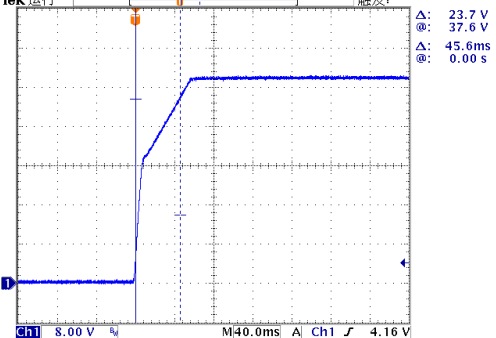
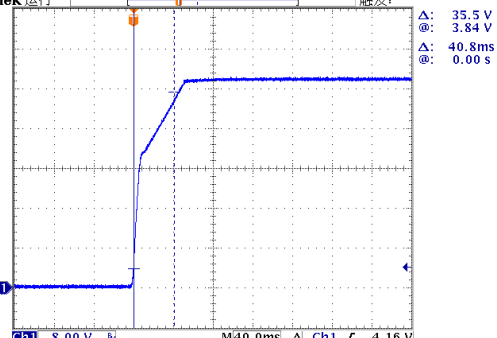
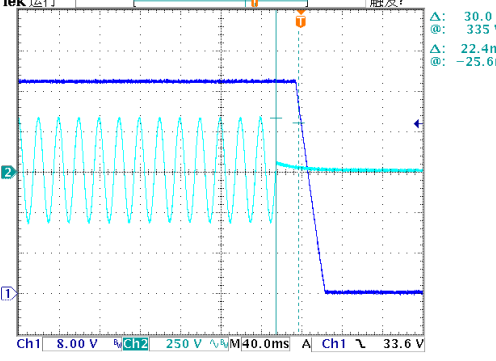
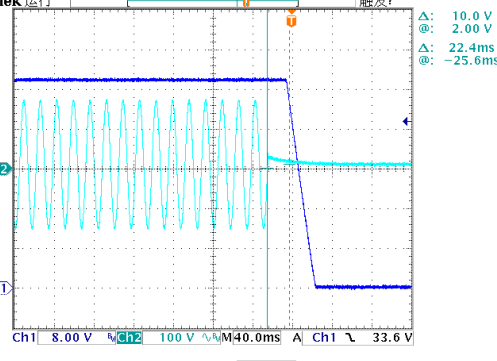
**OUTPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	25.2~42V	I/P: 230VAC O/P: LED MODE Ta: 25°C	6V~41V
2	OUTPUT VOLTAGE TOLERANCE	-1.0%~1.0%	I/P: 90 VAC / 305 VAC O/P: FULL/ NO LOAD Ta: 25°C	-0.03%~ 0.29%
3	LINE REGULATION	-0.5%~0.5%	I/P: 100VAC~ 305VAC O/P: FULL LOAD Ta: 25°C	0%~ 0%
4	LOAD REGULATION	-0.5%~ 0.5%	I/P: 230VAC O/P: FULL ~NO LOAD Ta: 25°C	-0.03%~0.04 %
5	DYNAMIC LOAD	4200mVp-p	I/P: 230VAC O/P : (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta: 25°C	(1) 676mVp-p (2) 472mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>FULL /50% LOAD 50%DUTY / 120HZ</p> </div> <div style="text-align: center;"> <p>FULL /50% LOAD 50%DUTY / 1KHZ</p> </div> </div>		
6	OVER/UNDERSHOOT TEST	$\pm 5\%$	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5 %
7	RIPPLE & NOISE (Max)	250mVp-p	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	52.0mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency:</p> </div> <div style="text-align: center;"> <p>low frequency:</p> </div> </div>		



# 120W Single Output Switching Power Supply

# NPF-120 series

8	SET UP TIME(Max) 230VAC/ 500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: 95% LOAD Ta: 25°C	230VAC/ 292ms 115VAC/ 240ms
<p>INPUT=230VAC/50HZ @ 95% LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>  <p>Δ: 230 V @: 10.0 V Δ: 292ms @: -280ms</p> <p>Ch1 8.00 V 250 V 200ms A Ch1 33.6 V</p>		<p>INPUT=115VAC/50HZ @ 95% LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>  <p>Δ: 138 V @: 12.0 V Δ: 240ms @: -228ms</p> <p>Ch1 8.00 V 100 V 200ms A Ch1 33.6 V</p>	
9	RISE TIME (Max) 230VAC/ 80ms 115VAC/ 80ms	I/P: 230 VAC I/P: 115 VAC O/P: 95% LOAD Ta: 25°C	230VAC/45.6ms 115VAC/40.8ms
<p>INPUT=230VAC/50HZ @ 95% LOAD</p> <p>CH1: Output Voltage</p>  <p>Δ: 23.7 V @: 37.6 V Δ: 45.6ms @: 0.00 s</p> <p>Ch1 8.00 V M40.0ms A Ch1 4.16 V</p>		<p>INPUT=115VAC/50HZ @ 95% LOAD</p> <p>CH1: Output Voltage</p>  <p>Δ: 35.5 V @: 3.84 V Δ: 40.8ms @: 0.00 s</p> <p>Ch1 8.00 V M40.0ms A Ch1 4.16 V</p>	
10	HOLD UP TIME(Typ) 230VAC/ 16ms 115VAC/ 16ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/22.4ms 115VAC/22.4ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>  <p>Δ: 30.0 V @: 3.35 V Δ: 22.4ms @: -25.6ms</p> <p>Ch1 8.00 V 250 V 40.0ms A Ch1 33.6 V</p>		<p>INPUT=115VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p>  <p>Δ: 10.0 V @: 2.00 V Δ: 22.4ms @: -25.6ms</p> <p>Ch1 8.00 V 100 V 40.0ms A Ch1 33.6 V</p>	

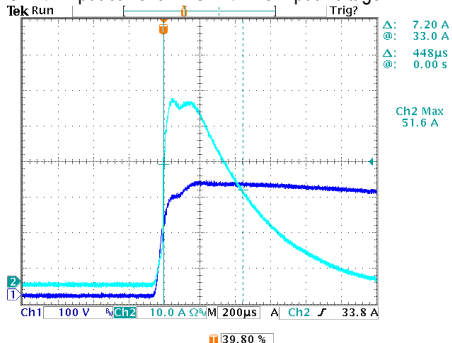


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~305V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230VAC ON: 3Sec OFF: 3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~305 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	1.3A/115VAC 0.65A/230VAC 0.55A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I=1.174A/ 115VAC I=0.591A/ 230VAC I=0.504A/ 277VAC
4	LEAKAGE CURRENT	< 0.25mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.003 mA N-FG: 0.003 mA
5	NO LOAD POWER CONSUMPTION	< 0.15W	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.095W
6	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be lower than 20% when output loading is 60% or higher at 115V/230VAC	I/P: 115VAC I/P: 230VAC O/P: 60% LOAD	THD: 5.73 %/115VAC THD: 14.27 %/230VAC
		Total harmonic distortion will be lower than 20% when output loading is 75% or higher at 277VAC	I/P: 277VAC O/P: 75% LOAD	THD: 16.21 %
7	INRUSH CURRENT(Typ)	60A/230VAC Twidth =520 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=51.6A/ 230VAC Twidth =448us

INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage





120W Single Output Switching Power Supply

NPF-120 series

8	EFFICIENCY(Typ)	90%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	90.44%																																												
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (%)</th> <th>230V (%)</th> <th>115V (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>78.0</td><td>80.0</td><td>79.0</td></tr> <tr><td>20%</td><td>83.0</td><td>81.5</td><td>85.5</td></tr> <tr><td>30%</td><td>89.5</td><td>90.0</td><td>88.5</td></tr> <tr><td>40%</td><td>90.5</td><td>90.5</td><td>89.0</td></tr> <tr><td>50%</td><td>87.5</td><td>88.0</td><td>89.5</td></tr> <tr><td>60%</td><td>89.0</td><td>89.0</td><td>90.0</td></tr> <tr><td>70%</td><td>89.5</td><td>89.5</td><td>90.0</td></tr> <tr><td>80%</td><td>90.0</td><td>90.0</td><td>90.0</td></tr> <tr><td>90%</td><td>90.5</td><td>90.5</td><td>90.0</td></tr> <tr><td>100%</td><td>90.5</td><td>90.5</td><td>90.0</td></tr> </tbody> </table>					LOAD (%)	277V (%)	230V (%)	115V (%)	10%	78.0	80.0	79.0	20%	83.0	81.5	85.5	30%	89.5	90.0	88.5	40%	90.5	90.5	89.0	50%	87.5	88.0	89.5	60%	89.0	89.0	90.0	70%	89.5	89.5	90.0	80%	90.0	90.0	90.0	90%	90.5	90.5	90.0	100%	90.5	90.5	90.0
LOAD (%)	277V (%)	230V (%)	115V (%)																																													
10%	78.0	80.0	79.0																																													
20%	83.0	81.5	85.5																																													
30%	89.5	90.0	88.5																																													
40%	90.5	90.5	89.0																																													
50%	87.5	88.0	89.5																																													
60%	89.0	89.0	90.0																																													
70%	89.5	89.5	90.0																																													
80%	90.0	90.0	90.0																																													
90%	90.5	90.5	90.0																																													
100%	90.5	90.5	90.0																																													
9	POWER FACTOR	0.97/ 115VAC 0.96/ 230VAC 0.94/ 277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.998/ 115VAC PF=0.981/ 230VAC PF=0.952/ 277VAC																																												
<p>Constant Current Mode</p> <table border="1"> <caption>Power Factor vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>277V (PF)</th> <th>230V (PF)</th> <th>115V (PF)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.55</td><td>0.62</td><td>0.78</td></tr> <tr><td>20%</td><td>0.70</td><td>0.78</td><td>0.47</td></tr> <tr><td>30%</td><td>0.41</td><td>0.42</td><td>0.50</td></tr> <tr><td>40%</td><td>0.41</td><td>0.43</td><td>0.52</td></tr> <tr><td>50%</td><td>0.87</td><td>0.92</td><td>0.99</td></tr> <tr><td>60%</td><td>0.89</td><td>0.94</td><td>0.99</td></tr> <tr><td>70%</td><td>0.91</td><td>0.95</td><td>0.99</td></tr> <tr><td>80%</td><td>0.92</td><td>0.96</td><td>0.99</td></tr> <tr><td>90%</td><td>0.93</td><td>0.97</td><td>0.99</td></tr> <tr><td>100%</td><td>0.93</td><td>0.97</td><td>0.99</td></tr> </tbody> </table>					LOAD (%)	277V (PF)	230V (PF)	115V (PF)	10%	0.55	0.62	0.78	20%	0.70	0.78	0.47	30%	0.41	0.42	0.50	40%	0.41	0.43	0.52	50%	0.87	0.92	0.99	60%	0.89	0.94	0.99	70%	0.91	0.95	0.99	80%	0.92	0.96	0.99	90%	0.93	0.97	0.99	100%	0.93	0.97	0.99
LOAD (%)	277V (PF)	230V (PF)	115V (PF)																																													
10%	0.55	0.62	0.78																																													
20%	0.70	0.78	0.47																																													
30%	0.41	0.42	0.50																																													
40%	0.41	0.43	0.52																																													
50%	0.87	0.92	0.99																																													
60%	0.89	0.94	0.99																																													
70%	0.91	0.95	0.99																																													
80%	0.92	0.96	0.99																																													
90%	0.93	0.97	0.99																																													
100%	0.93	0.97	0.99																																													

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 %~ 108 %	I/P: 230VAC O/P: TESTING Ta: 25°C	100.86%/ 230VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	46V~54V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	50.4V/ 230VAC Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 295VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

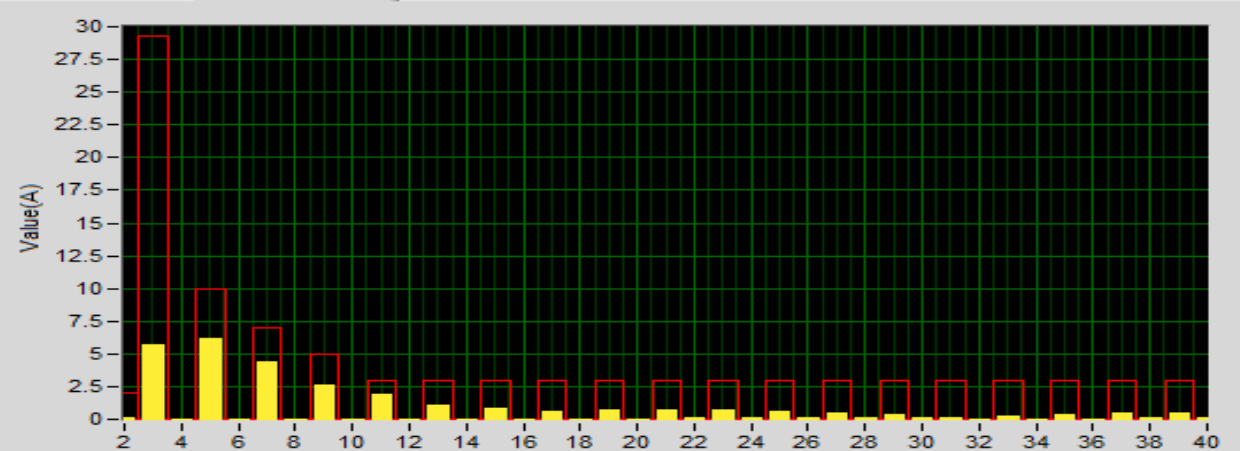
**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (C to E) <b>Peak Voltage</b>	Q 2 Rated 730V/10A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 640V (2) 500V (3) 636V
2	<b>Diode Peak Voltage</b>	Q101 Rated 200V/20A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 175V (2) 114V (3) 169V
3	<b>Input Capacitor Voltage</b>	C5 Rated 100u/ 450V	I/P: High-Line +3V =308 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 448V (2) 444V (3) 447V
4	<b>Control IC Voltage Test</b>	U1 Rated 28V	I/P: High-Line +3V =308 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change Ta: 25°C	(1) 17.7V (2) 17.3V (3) 17.3V
5	PFC Transistor ( D to S) or (C to E) <b>Peak Voltage</b>	Q 1 Rated 600V/11A	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 470V (2) 458V (3) 468V

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2KVAC/min Ta: 25°C	I/P-O/P: 1.93mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C	I/P-O/P: >9999MΩ

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 115VAC/230VAC/50HZ O/P: 60%/FULL LOAD I/P: 277VAC/50HZ O/P: 75%/FULL LOAD Ta:25°C	PASS
				
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 INDUSTRY L-N: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			



■ **RELIABILITY TEST**

**ENVIRONMENT TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: NPF-120-48 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 29.2°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 51.1°C																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 29.2 °C</th> <th>HIGH AMBIENT Ta=51.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>C5</td><td>71.6°C</td><td>90.1°C</td></tr> <tr><td>2</td><td>C105</td><td>65.6°C</td><td>84.5°C</td></tr> <tr><td>3</td><td>T1</td><td>73.3°C</td><td>92.4°C</td></tr> <tr><td>4</td><td>Q1</td><td>76.3°C</td><td>95.8°C</td></tr> <tr><td>5</td><td>Q2</td><td>82.6°C</td><td>102.8°C</td></tr> <tr><td>6</td><td>Q101</td><td>68.4°C</td><td>86.7°C</td></tr> <tr><td>7</td><td>L3</td><td>77.4°C</td><td>96.9°C</td></tr> <tr><td>8</td><td>D6</td><td>86.1°C</td><td>106.7°C</td></tr> <tr><td>9</td><td>C45</td><td>67.3°C</td><td>85.9°C</td></tr> <tr><td>10</td><td>R7</td><td>84.3°C</td><td>104.1°C</td></tr> <tr><td>11</td><td>U1</td><td>66.7°C</td><td>85.4°C</td></tr> <tr><td>12</td><td>C106</td><td>61.9°C</td><td>80.6°C</td></tr> <tr><td>13</td><td>RTH3</td><td>64.9°C</td><td>83.4°C</td></tr> <tr><td>15</td><td>TC</td><td>68.4°C</td><td>87.3°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 29.2 °C	HIGH AMBIENT Ta=51.1 °C	1	C5	71.6°C	90.1°C	2	C105	65.6°C	84.5°C	3	T1	73.3°C	92.4°C	4	Q1	76.3°C	95.8°C	5	Q2	82.6°C	102.8°C	6	Q101	68.4°C	86.7°C	7	L3	77.4°C	96.9°C	8	D6	86.1°C	106.7°C	9	C45	67.3°C	85.9°C	10	R7	84.3°C	104.1°C	11	U1	66.7°C	85.4°C	12	C106	61.9°C	80.6°C	13	RTH3	64.9°C	83.4°C	15	TC	68.4°C	87.3°C
NO	Position	ROOM AMBIENT Ta= 29.2 °C	HIGH AMBIENT Ta=51.1 °C																																																													
1	C5	71.6°C	90.1°C																																																													
2	C105	65.6°C	84.5°C																																																													
3	T1	73.3°C	92.4°C																																																													
4	Q1	76.3°C	95.8°C																																																													
5	Q2	82.6°C	102.8°C																																																													
6	Q101	68.4°C	86.7°C																																																													
7	L3	77.4°C	96.9°C																																																													
8	D6	86.1°C	106.7°C																																																													
9	C45	67.3°C	85.9°C																																																													
10	R7	84.3°C	104.1°C																																																													
11	U1	66.7°C	85.4°C																																																													
12	C106	61.9°C	80.6°C																																																													
13	RTH3	64.9°C	83.4°C																																																													
15	TC	68.4°C	87.3°C																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/100VAC O/P: FULL LOAD Ta= -45°C / -30°C	TEST: OK																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE	I/P: 315VAC O/P: FULL LOAD Ta=45 °C HUMIDITY= 95% R.H	TEST: OK																																																												
4	TEMPERATURE COEFFICIENT	±0.03%/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.002%/°C (0~50°C)																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																												





# 120W Single Output Switching Power Supply

# NPF-120 series

6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -45°C~+50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST turn on 58 sec, turn off 2 sec;	TEST: OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 12min/sweep cycle (4) Acceleration: 5G (5) Test Time: 72min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	NPF-120-48: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 45 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 45 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 45 °C LIFE TIME	(1) 174464 HRS (2) 53707 HRS (3) 99512 HRS (4) 103761 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 2632.6K hrs min. Telcordia SR-332 (Bellcore); 295.2K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): 50000 hours @ TC 70°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	ZHANGZJ/ZHUOKB	SKY	LIUWY